

AS/NZS Test Report

Product Name : Scanner

Model No. : IRIScan™ Pro 3 Wifi

Applicant : AVISION INC.

Address : No.20, Creation Rd.1, Science Park, Hsinchu, Taiwan 300 R.O.C.

Date of Receipt : 2012/10/11

Report No. : 13A0229R-ITAUP09V02

Issued Date : 2013/10/17

Report Version : V2.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, NIST or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 2013/10/17
Report No. : 13A0229R-ITAUP09V02



Product Name : Scanner
Applicant : AVISION INC.
Address : No.20, Creation Rd.1, Science Park, Hsinchu, Taiwan
300 R.O.C.
Manufacturer : (1) AVISION INC.
(2) AVISION (Suzhou) CO., LTD
Model No. : IRIScan™ Pro 3 Wifi
EUT Voltage : Mode 1/2: DC 3.7V (Power by Battery)
Mode 3/4/5: AC 100-240V, 50/60Hz
Trade Name : IRIS
Applicable Standard : AS/NZS CISPR 22: 2009+A1: 2010 Class B
Test Result : Complied
Performed Location : Hsinchu EMC Laboratory
N0. 75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen,
Qionglin Shiang, Hsinchu County 307, Taiwan
TEL:+886-3-592-8858 / FAX:+886-3-592-8859

Documented By :

Fonbo Fang

(Fonbo Fang / Engineering Adm. Assistant)

Reviewed By :

Mensheo Sie

(Mensheo Sie / Engineer)

Approved By :

Ben Wu

(Ben Wu / Project Manager)

Laboratory Information

We , **QuieTek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted (audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scopes:

Taiwan R.O.C.	:	BSMI, NCC, TAF
Germany	:	TUV Rheinland
Norway	:	DNV
USA	:	FCC
Japan	:	VCCI

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

LinKou Testing Laboratory :

No. 5, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

TABLE OF CONTENTS

Description	Page
1. General Information	5
1.1. EUT Description	5
1.2. Mode of Operation	6
1.3. Tested System Details	7
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	10
2. Technical Test	11
2.1. Summary of Test Result	11
2.2. List of Test Equipment	12
2.3. Measurement Uncertainty	13
2.4. Test Environment	13
3. Conducted Emission	14
3.1. Test Specification	14
3.2. Test Setup	14
3.3. Limit	14
3.4. Test Procedure	15
3.5. Deviation from Test Standard	15
3.6. Test Result	16
4. Radiated Emission	25
4.1. Test Specification	25
4.2. Test Setup	25
4.3. Limit	26
4.4. Test Procedure	27
4.5. Deviation from Test Standard	27
4.6. Test Result	28
4.7. Test Photograph	48
5. Attachment	58
EUT Photograph	58

1. General Information

1.1. EUT Description

Product Name	Scanner
Trade Name	IRIS
Model No.	IRIScan™ Pro 3 Wifi

Component	
USB Cable	Shielded, 1.0m, one ferrite core bonded
Power Adapter	DVE, DSC-5CU-05 050100 I/P: 100-240V, 50/60Hz, 0.2A O/P: +5V $\equiv$ 1A

Note:

1. This EUT is a Scanner.

1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode	
Mode 1: Scan to SD Mode 2: WiFi Mode 3: Read Mode 4: Scan to PC Mode 5: Charge	
Final Test Mode	
Emission	Mode 1: Scan to SD Mode 2: WiFi Mode 3: Read Mode 4: Scan to PC Mode 5: Charge

1.3. Tested System Details


The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:


Test Mode	Mode 1: Scan to SD Mode 2: WiFi Mode 5: Charge
-----------	--

N/A

Test Mode		Mode 3: Read Mode 4: Scan to PC			
Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Monitor	CHI MEI	A170E1-09	3UC120954HA0063	Non-Shielded, 1.8m
2	Notebook PC	HP	NX6320	CNU62D1F5Y	Non-Shielded, 1.8m
3	Modem	ACEEX	DM-1414	0102027545	Non-Shielded, 1.6m
4	USB 2.0 Flash Memory	Apacer	AH223	N/A	--
5	USB 2.0 Flash Memory	Apacer	AH223	N/A	--
6	Microphone & Earphone	Fujiei	SBZ-38	N/A	--
7	USB Mouse	Logitech	M-UV83	LZE35006044	--
8	Printer	HP	C2642A	MY75L1D2XN	Non-Shielded, 0.7m

1.4. Configuration of Tested System

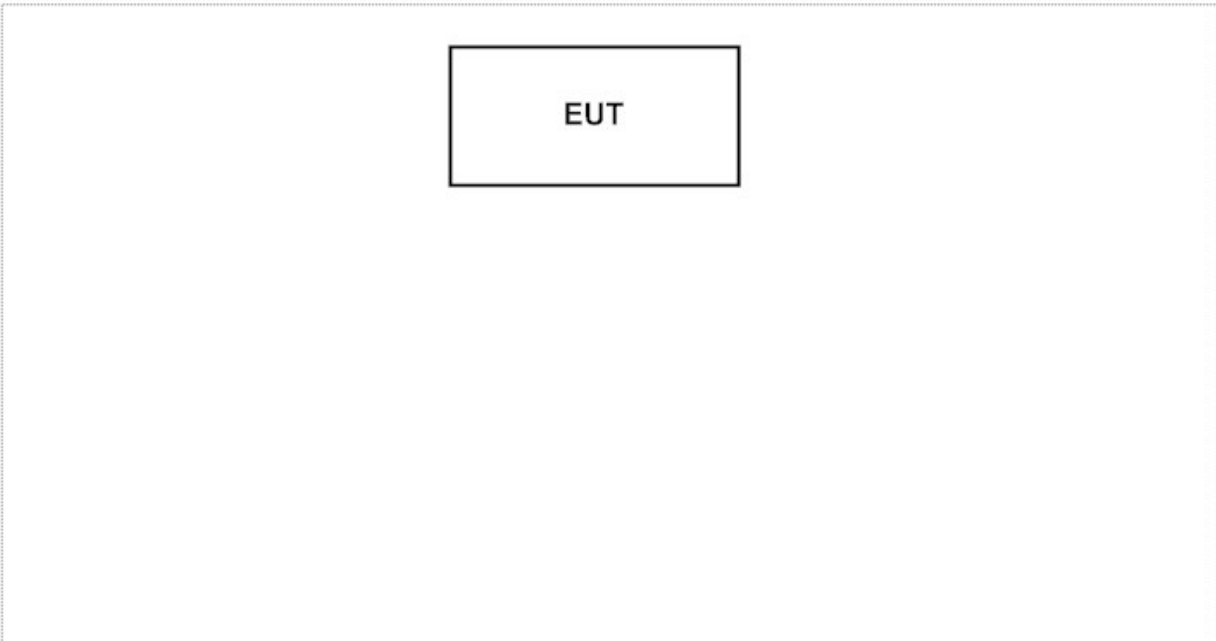Test Mode	Mode 1: Scan to SD Mode 2: WiFi Mode 5: Charge
Connection Diagram	
 The diagram shows a single rectangular box labeled "EUT" (Equipment Under Test) centered within a larger rectangular frame. The frame has a dashed border, and the box has a solid border.	

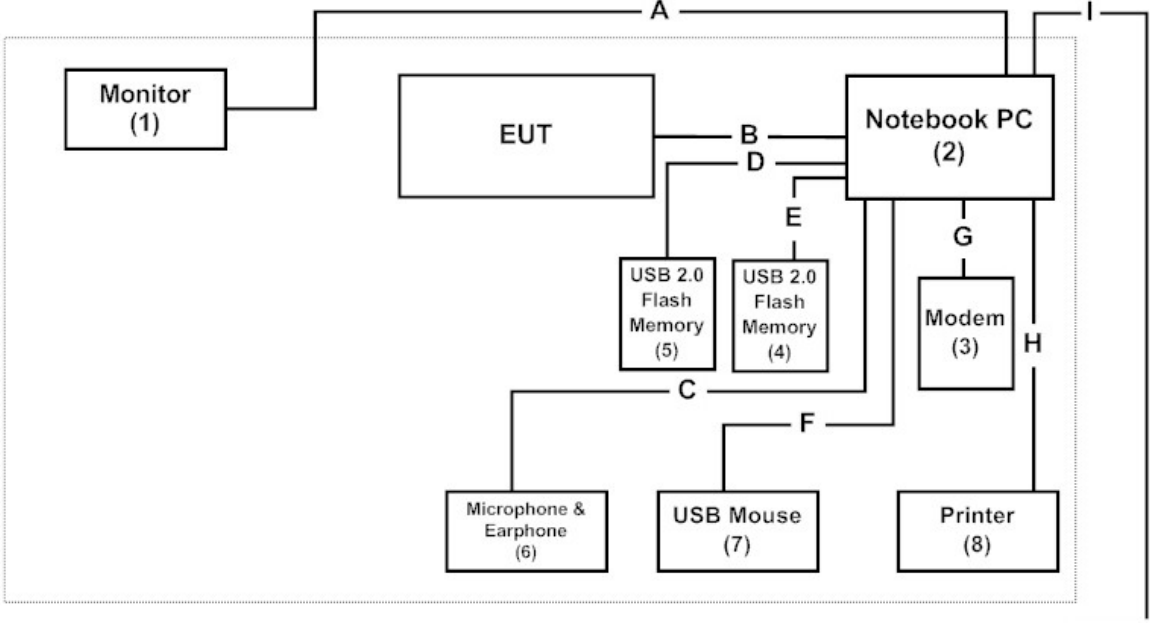Test Mode		Mode 3: Read
		Mode 4: Scan to PC
Connection Diagram		
 The diagram illustrates the hardware configuration for the test modes. A central dashed box represents the test environment. Inside, a Notebook PC (2) is the hub, connected to a Monitor (1) (A), a EUT (B), two USB 2.0 Flash Memory units (D, E), a Modem (3) (G), a USB Mouse (7) (F), a Microphone & Earphone (6) (C), and a Printer (8) (H). The PC is also connected to the Internet (I). Cables A through I are labeled to correspond with the table below.		
Signal Cable Type		Signal cable Description
A	VGA Cable	Shielded, 1.5m
B	USB Cable	Shielded, 1.0m, one ferrite core bonded
C	Microphone & Earphone Cable	Non Shielded, 1.8m
D	USB 2.0 Flash Memory Cable	Shielded, 1.0m
E	USB 2.0 Flash Memory Cable	Shielded, 1.0m
F	USB Mouse Cable	Shielded, 1.6m, one ferrite core bonded
G	Modem Cable	Shielded, 1.5m
H	Printer Cable	Shielded, 1.2m
I	LAN Cable	Non Shielded, 10m

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on 1.4. (refer to 1.4 configuration of tested system).
2	Turn on the power of all equipment
3	Boot the Notebook PC from Hard Disk.
4	Notebook PC reads test software from disk and then sent to scanner.
5	The EUT will start to operate and scan the video figure into Notebook PC.
6	Notebook PC will display " video figure" on monitor.
7	Repeat the above procedure (4) to (6).

2. Technical Test

2.1. Summary of Test Result

- ☒ No deviations from the test standards
- ☐ Deviations from the test standards as below description:

Emission			
Performed Item	Normative References	Test Performed	Deviation
Conducted Emission	AS/NZS CISPR 22: 2009+A1: 2010	Yes	No
Impedance Stabilization Network	AS/NZS CISPR 22: 2009+A1: 2010	No	No
Radiated Emission	AS/NZS CISPR 22: 2009+A1: 2010	Yes	No

2.2. List of Test Equipment

Conducted Emission/ SR3

Instrument	Manufacturer	Model No.	Serial No.	Next Cal. Date
LISN	R&S	ENV216	100096	2014/08/01
LISN	R&S	ESH3-Z5	836679/022	2014/01/20
Test Receiver	R&S	ESCS 30	825442/017	2014/01/01
Coaxial Cable	Harbour	RG-400	SR3	2014/08/14
Quietek EMI system	Quietek	Version 2.2	SR3	N/A

Radiated Emission/ Site2 (Under 1GHz)

Instrument	Manufacturer	Model No.	Serial No.	Next Cal. Date
Bilog Antenna	Schaffner	CBL6112B	2891(Site2)	2014/08/14
Spectrum Analyzer	Advantest	R3162	121200166	2014/02/22
Test Receiver	R&S	ESCS 30	836858/023	2014/03/07
Coaxial Switch	Anritsu	MP59B	6200410246(Site2)	2014/03/31
Coaxial Cable	Suhner	RG-214U	Site2-1	2014/03/31
Quietek EMI system	Quietek	Version 2.2	Site2	N/A

Radiated Emission/ CB1 (Above 1GHz)

Instrument	Manufacturer	Model No.	Serial No.	Next Cal. Date
k Type Cable	Huber Suhner	Sucoflex 102	25623/2	2014/02/21
Double Ridged Guide Horn Antenna	Schwarzback	BBHA 9120	D743	2014/02/17
Pre-Amplifier	MITEQ	JS41-00104000-58-5P	1438359	2014/04/21
PSA Series Spectrum analyzer	Agilent	E4440A	MY46187335	2014/01/27
Quietek EMI system	Quietek	Version 2.2	CB1	N/A

2.3. Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.26 dB.

Radiated Emission (Under 1GHz)

The measurement uncertainty is evaluated as ± 3.43 dB.

Radiated Emission (Above 1GHz)

The measurement uncertainty is evaluated as ± 3.65 dB.

2.4. Test Environment


Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	50
	Barometric pressure (mbar)	860-1060	950-1000
Radiated Emission	Temperature (°C)	15-35	25
	Humidity (%RH)	25-75	65
	Barometric pressure (mbar)	860-1060	950-1000

3. Conducted Emission

3.1. Test Specification

According to EMC Standard : AS/NZS CISPR 22

3.2. Test Setup

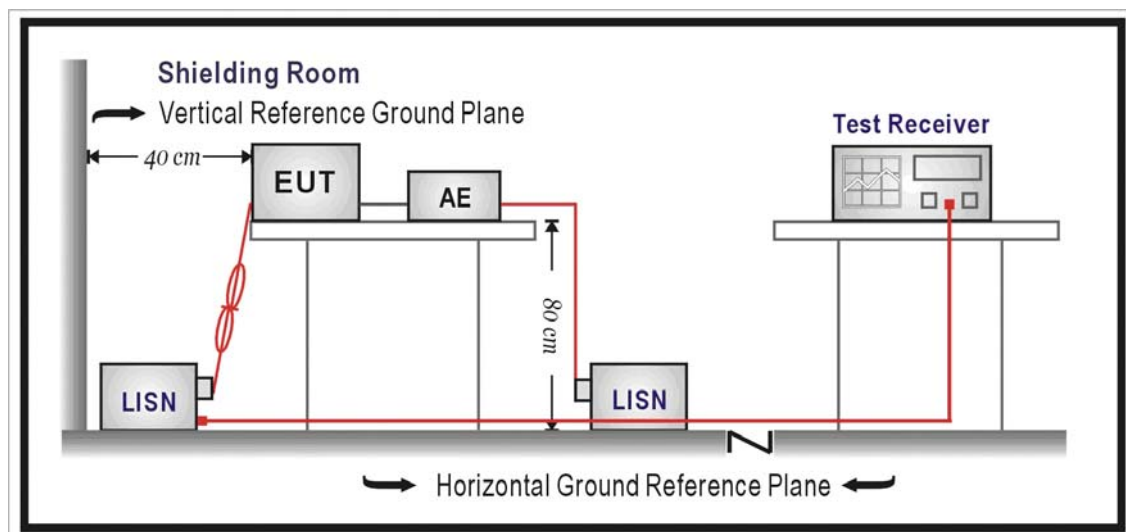

3.3. Limit

Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 – 46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

3.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

(Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed on conducted measurement.


Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Deviation from Test Standard

No deviation.

3.6. Test Result

Site : SR3	Time : 2013/09/04 - 19:15
Limit : CISPR_B_00M_QP	Margin : 10
Probe : SR3_LISN(16A)-3_0813 - Line1	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 3: Read

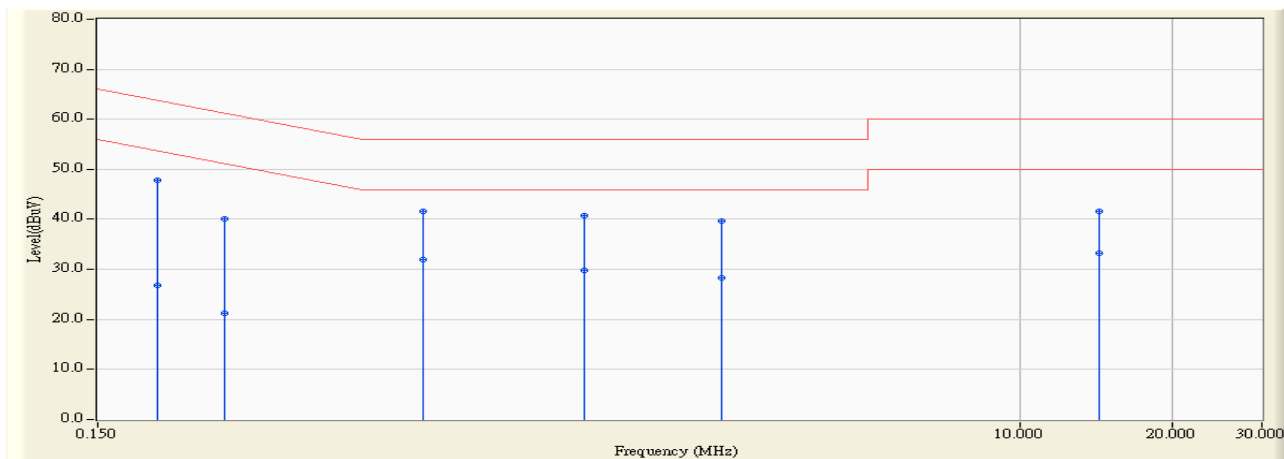


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.197	9.655	38.140	47.795	-15.946	63.741	QUASIPeAK
2		0.197	9.655	17.050	26.705	-27.036	53.741	AVERAGE
3		0.267	9.696	30.490	40.186	-21.019	61.205	QUASIPeAK
4		0.267	9.696	11.560	21.256	-29.949	51.205	AVERAGE
5		0.662	9.860	31.730	41.590	-14.410	56.000	QUASIPeAK
6	*	0.662	9.860	22.070	31.930	-14.070	46.000	AVERAGE
7		1.377	9.950	30.830	40.780	-15.220	56.000	QUASIPeAK
8		1.377	9.950	19.930	29.880	-16.120	46.000	AVERAGE
9		2.568	9.990	29.720	39.710	-16.290	56.000	QUASIPeAK
10		2.568	9.990	18.240	28.230	-17.770	46.000	AVERAGE
11		14.353	10.130	31.470	41.600	-18.400	60.000	QUASIPeAK
12		14.353	10.130	23.200	33.330	-16.670	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SR3	Time : 2013/09/04 - 19:17
Limit : CISPR_B_00M_QP	Margin : 10
Probe : SR3_LISN(16A)-3_0813 - Line2	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 3: Read

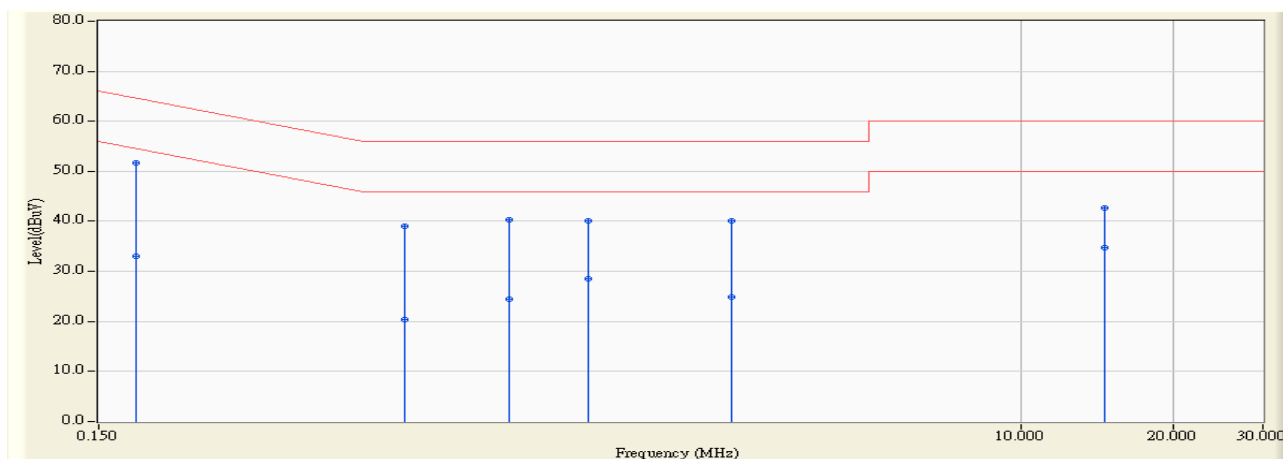

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.177	9.646	41.960	51.606	-13.003	64.609	QUASIPeAK
2		0.177	9.646	23.300	32.946	-21.663	54.609	AVERAGE
3		0.603	9.840	29.100	38.940	-17.060	56.000	QUASIPeAK
4		0.603	9.840	10.580	20.420	-25.580	46.000	AVERAGE
5		0.974	9.922	30.370	40.292	-15.708	56.000	QUASIPeAK
6		0.974	9.922	14.610	24.532	-21.468	46.000	AVERAGE
7		1.388	9.930	30.160	40.090	-15.910	56.000	QUASIPeAK
8		1.388	9.930	18.560	28.490	-17.510	46.000	AVERAGE
9		2.677	9.970	30.040	40.010	-15.990	56.000	QUASIPeAK
10		2.677	9.970	14.990	24.960	-21.040	46.000	AVERAGE
11		14.619	10.210	32.440	42.650	-17.350	60.000	QUASIPeAK
12		14.619	10.210	24.530	34.740	-15.260	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SR3	Time : 2013/09/04 - 19:28
Limit : CISPR_B_00M_QP	Margin : 10
Probe : SR3_LISN(16A)-3_0813 - Line1	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 4: Scan to PC




		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.166	9.642	41.790	51.432	-13.745	65.177	QUASIPeAK
2		0.166	9.642	24.710	34.352	-20.825	55.177	AVERAGE
3		0.259	9.693	30.840	40.533	-20.918	61.451	QUASIPeAK
4		0.259	9.693	10.580	20.273	-31.178	51.451	AVERAGE
5		0.619	9.853	30.440	40.293	-15.707	56.000	QUASIPeAK
6		0.619	9.853	19.360	29.213	-16.787	46.000	AVERAGE
7		1.158	9.940	31.110	41.050	-14.950	56.000	QUASIPeAK
8		1.158	9.940	16.770	26.710	-19.290	46.000	AVERAGE
9		2.322	9.980	30.870	40.850	-15.150	56.000	QUASIPeAK
10		2.322	9.980	17.670	27.650	-18.350	46.000	AVERAGE
11		12.732	10.120	35.300	45.420	-14.580	60.000	QUASIPeAK
12	*	12.732	10.120	26.750	36.870	-13.130	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SR3	Time : 2013/09/04 - 19:30
Limit : CISPR_B_00M_QP	Margin : 10
Probe : SR3_LISN(16A)-3_0813 - Line2	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 4: Scan to PC

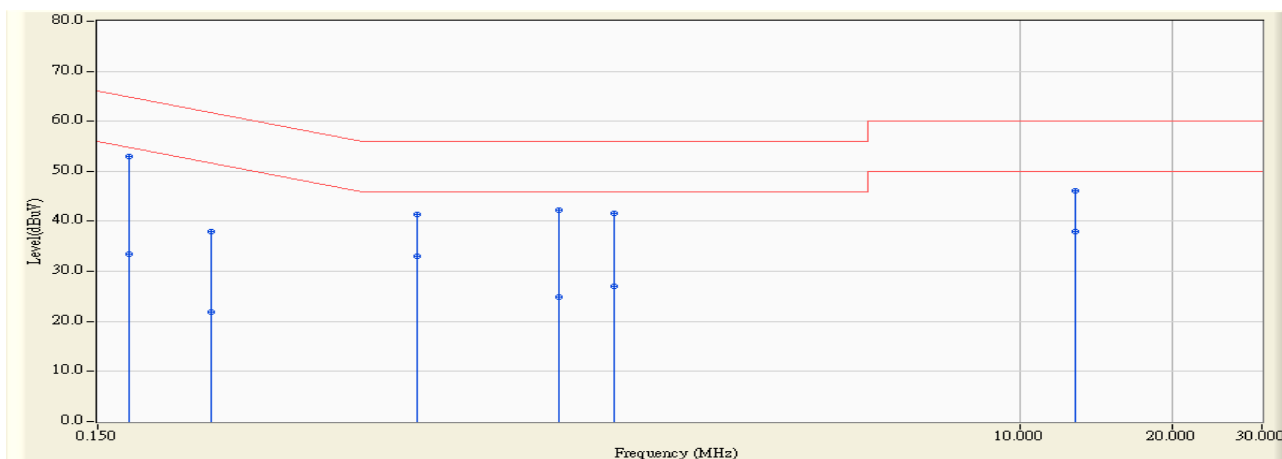


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.173	9.645	43.430	53.075	-11.719	64.794	QUASIPeAK
2		0.173	9.645	23.880	33.525	-21.269	54.794	AVERAGE
3		0.252	9.691	28.190	37.881	-23.825	61.705	QUASIPeAK
4		0.252	9.691	12.120	21.811	-29.895	51.705	AVERAGE
5		0.642	9.850	31.480	41.330	-14.670	56.000	QUASIPeAK
6		0.642	9.850	23.160	33.010	-12.990	46.000	AVERAGE
7		1.224	9.930	32.220	42.150	-13.850	56.000	QUASIPeAK
8		1.224	9.930	14.970	24.900	-21.100	46.000	AVERAGE
9		1.572	9.940	31.710	41.650	-14.350	56.000	QUASIPeAK
10		1.572	9.940	17.030	26.970	-19.030	46.000	AVERAGE
11		12.853	10.180	35.860	46.040	-13.960	60.000	QUASIPeAK
12		12.853	10.180	27.860	38.040	-11.960	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SR3	Time : 2013/09/04 - 17:19
Limit : CISPR_B_00M_QP	Margin : 10
Probe : SR3_LISN(16A)-3_0813 - Line1	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 5: Charge

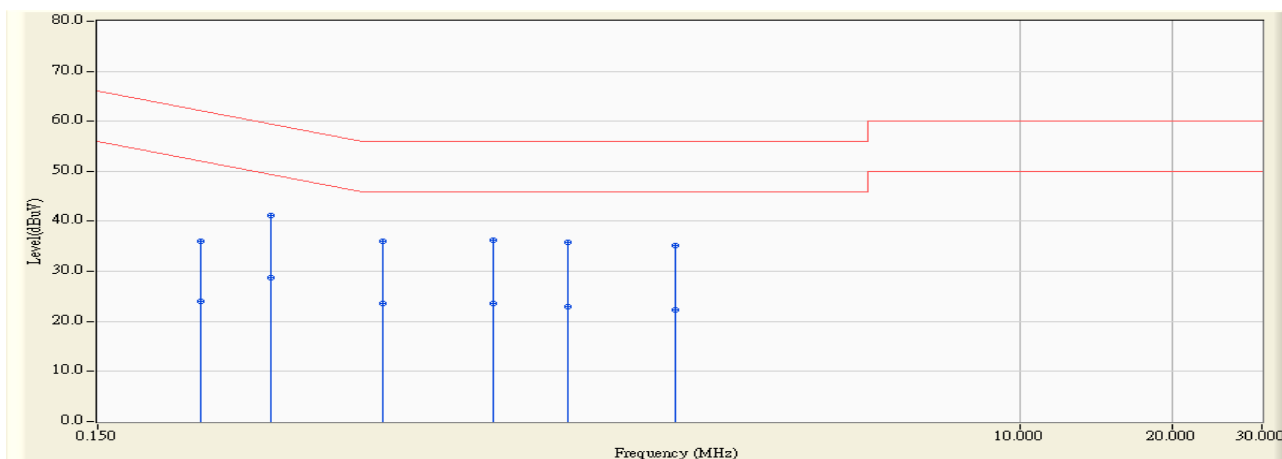


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.240	9.684	26.330	36.014	-26.088	62.102	QUASIPeAK
2		0.240	9.684	14.250	23.934	-28.168	52.102	AVERAGE
3	*	0.330	9.734	31.430	41.164	-18.295	59.459	QUASIPeAK
4		0.330	9.734	19.060	28.794	-20.665	49.459	AVERAGE
5		0.548	9.840	26.150	35.990	-20.010	56.000	QUASIPeAK
6		0.548	9.840	13.850	23.690	-22.310	46.000	AVERAGE
7		0.908	9.920	26.330	36.250	-19.750	56.000	QUASIPeAK
8		0.908	9.920	13.760	23.680	-22.320	46.000	AVERAGE
9		1.275	9.950	25.790	35.740	-20.260	56.000	QUASIPeAK
10		1.275	9.950	13.020	22.970	-23.030	46.000	AVERAGE
11		2.076	9.960	25.190	35.150	-20.850	56.000	QUASIPeAK
12		2.076	9.960	12.410	22.370	-23.630	46.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : SR3	Time : 2013/09/04 - 17:20
Limit : CISPR_B_00M_QP	Margin : 10
Probe : SR3_LISN(16A)-3_0813 - Line2	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 5: Charge

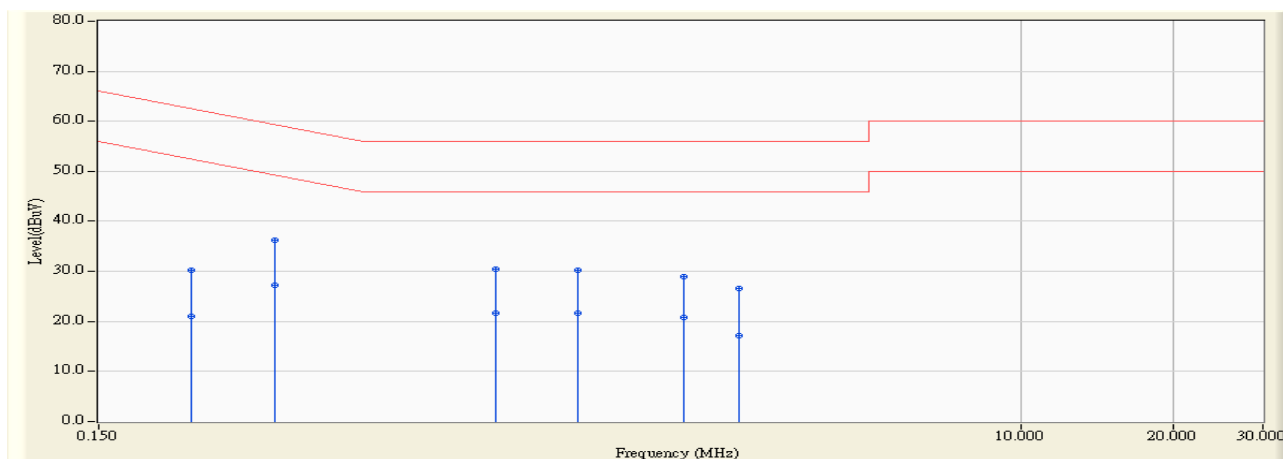

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.228	9.676	20.460	30.136	-32.382	62.518	QUASIPeAK
2		0.228	9.676	11.440	21.116	-31.402	52.518	AVERAGE
3		0.334	9.726	26.570	36.296	-23.065	59.361	QUASIPeAK
4	*	0.334	9.726	17.600	27.326	-22.035	49.361	AVERAGE
5		0.916	9.912	20.650	30.562	-25.438	56.000	QUASIPeAK
6		0.916	9.912	11.840	21.752	-24.248	46.000	AVERAGE
7		1.330	9.930	20.390	30.320	-25.680	56.000	QUASIPeAK
8		1.330	9.930	11.800	21.730	-24.270	46.000	AVERAGE
9		2.146	9.943	18.920	28.863	-27.137	56.000	QUASIPeAK
10		2.146	9.943	10.760	20.703	-25.297	46.000	AVERAGE
11		2.767	9.980	16.550	26.530	-29.470	56.000	QUASIPeAK
12		2.767	9.980	7.250	17.230	-28.770	46.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

3.7 Test Photograph

Test Mode : Mode 3: Read

Description : Front View of Conducted Emission Test Setup



Test Mode : Mode 3: Read

Description : Back View of Conducted Emission Test Setup



Test Mode : Mode 4: Scan to PC

Description : Front View of Conducted Emission Test Setup



Test Mode : Mode 4: Scan to PC

Description : Back View of Conducted Emission Test Setup



Test Mode : Mode 5: Charge

Description : Front View of Conducted Emission Test Setup



Test Mode : Mode 5: Charge

Description : Back View of Conducted Emission Test Setup




4. Radiated Emission

4.1. Test Specification


According to EMC Standard : AS/NZS CISPR 22

4.2. Test Setup

Under 1GHz Test Setup

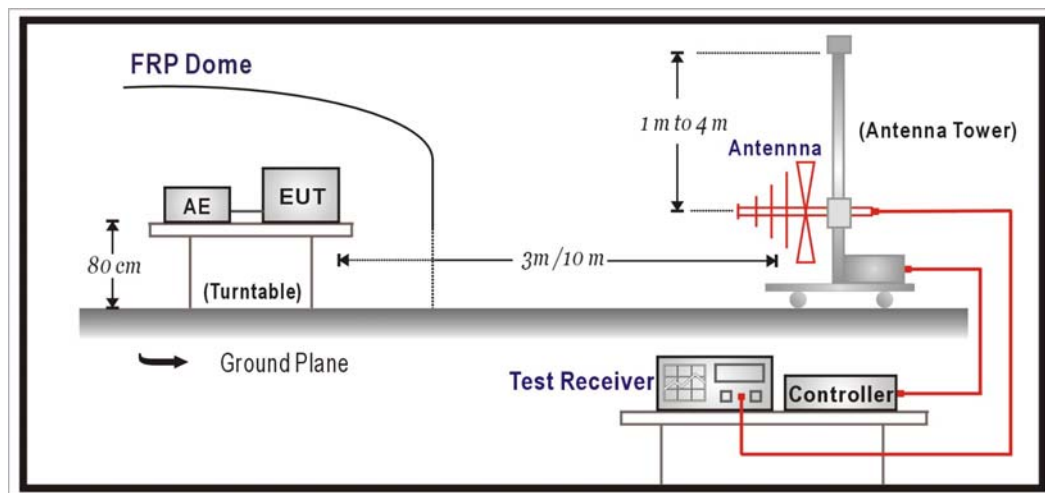

Above 1GHz Test Setup:

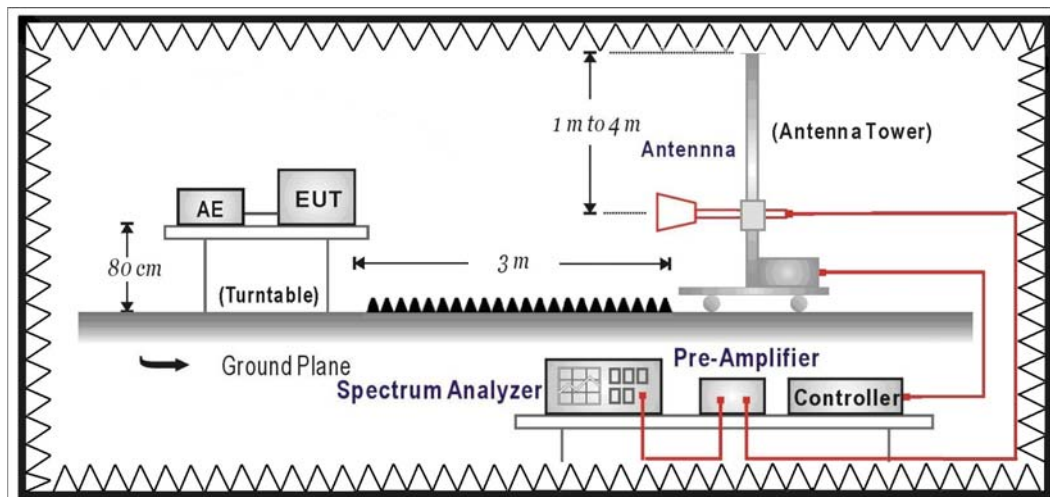

4.3. Limit

Limits		
Frequency (MHz)	Distance (m)	dBuV/m
30 – 230	10	30
230 – 1000	10	37

Limits			
Frequency (GHz)	Distance (m)	Peak (dBuV/m)	Average (dBuV/m)
1 – 3	3	70	50
3 – 6	3	74	54

Remark:

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 6 GHz, whichever is lower

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 10 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

All cable leaving the table-top EUT for a connection outside the test site (for example, mains cable, telephone lines, connections to auxiliary equipment located outside the test area) shall be fitted with ferrite clamps placed on the floor at the point where the cable reached the floor.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.

Radiated emissions were investigated over the frequency range from 30MHz to 1GHz using a receiver bandwidth of 120kHz. Radiated was performed at an antenna to EUT distance of 10 meters.


Radiated emissions were investigated over the frequency range from 1GHz to 6GHz using a receiver bandwidth of 1MHz. Radiated was performed at an antenna to EUT distance of 3 meters.

4.5. Deviation from Test Standard

No deviation.

4.6. Test Result

Site : Site2	Time : 2013/08/23 - 10:55
Limit : CISPR_B_10M_QP	Margin : 6
Probe : SITE2_10M-3_0426 - HORIZONTAL	Power : DC3.7V (Power by battery)
EUT : Scanner	Note : Mode 1: Scan to SD

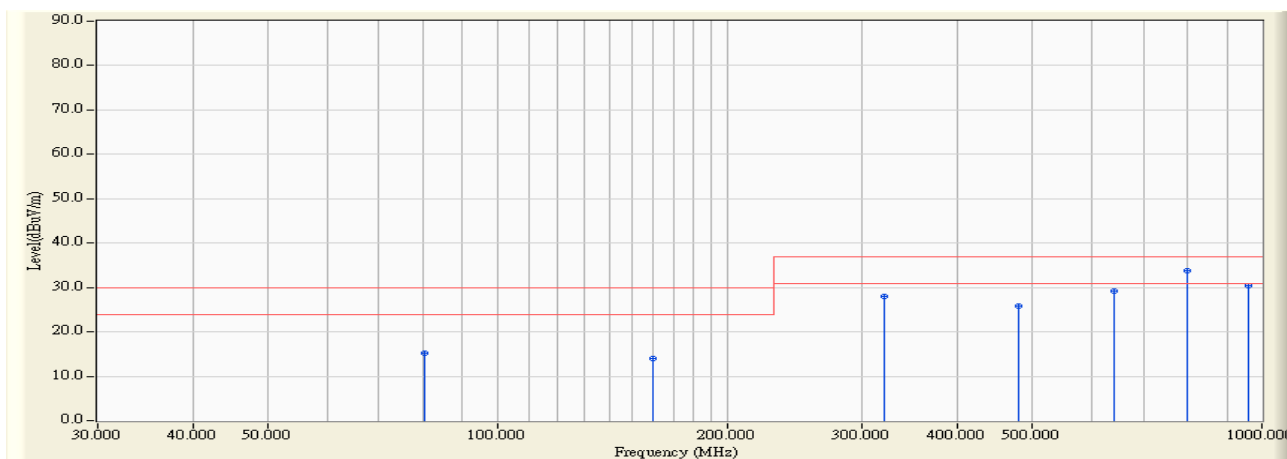


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		80.375	11.159	3.930	15.089	-14.911	30.000	QUASIPeAK
2		160.000	13.675	0.300	13.975	-16.025	30.000	QUASIPeAK
3		320.025	17.977	9.960	27.937	-9.063	37.000	QUASIPeAK
4		480.050	22.528	3.400	25.928	-11.072	37.000	QUASIPeAK
5		640.050	25.403	3.900	29.303	-7.697	37.000	QUASIPeAK
6	*	800.075	27.880	6.000	33.880	-3.120	37.000	QUASIPeAK
7		960.010	30.240	0.200	30.440	-6.560	37.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : CB1	Time : 2013/08/27 - 13:55
Limit : CISPR_22_B_(Above_1G)_3M_PK	Margin : 0
Probe : CB1_CISPR_22_B(above1G)-1_0901 - HORIZONTAL	Power : DC3.7V (Power by battery)
EUT : Scanner	Note : Mode 1: Scan to SD

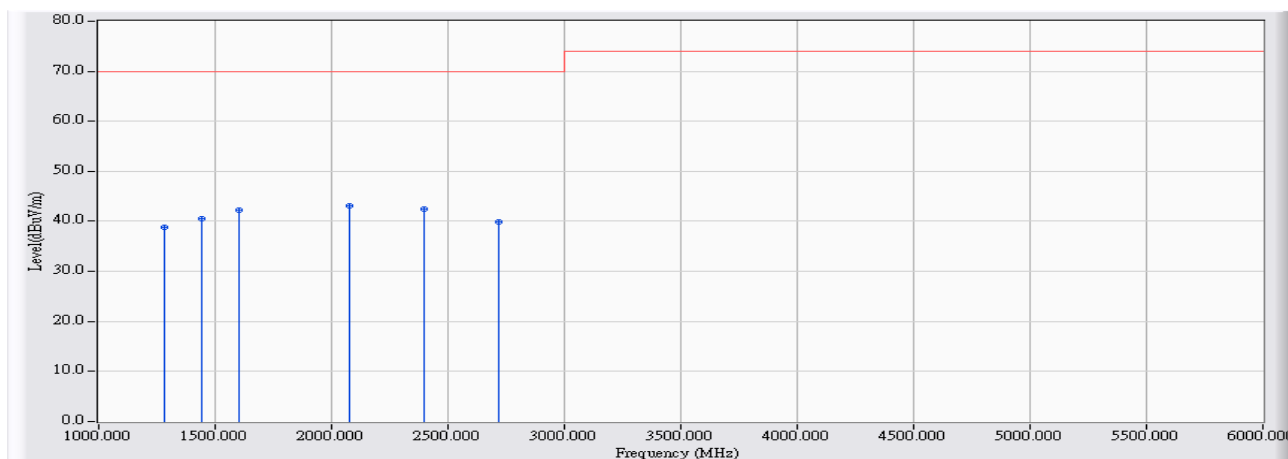


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		1280.000	-8.043	46.905	38.862	-31.138	70.000	PEAK
2		1440.000	-7.361	47.946	40.585	-29.415	70.000	PEAK
3		1600.000	-6.756	48.958	42.202	-27.798	70.000	PEAK
4	*	2080.000	-5.133	48.203	43.070	-26.930	70.000	PEAK
5		2400.000	-4.305	46.820	42.515	-27.485	70.000	PEAK
6		2720.000	-3.155	43.100	39.945	-30.055	70.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : Site2	Time : 2013/08/23 - 10:53
Limit : CISPR_B_10M_QP	Margin : 6
Probe : SITE2_10M-3_0426 - VERTICAL	Power : DC3.7V (Power by battery)
EUT : Scanner	Note : Mode 1: Scan to SD

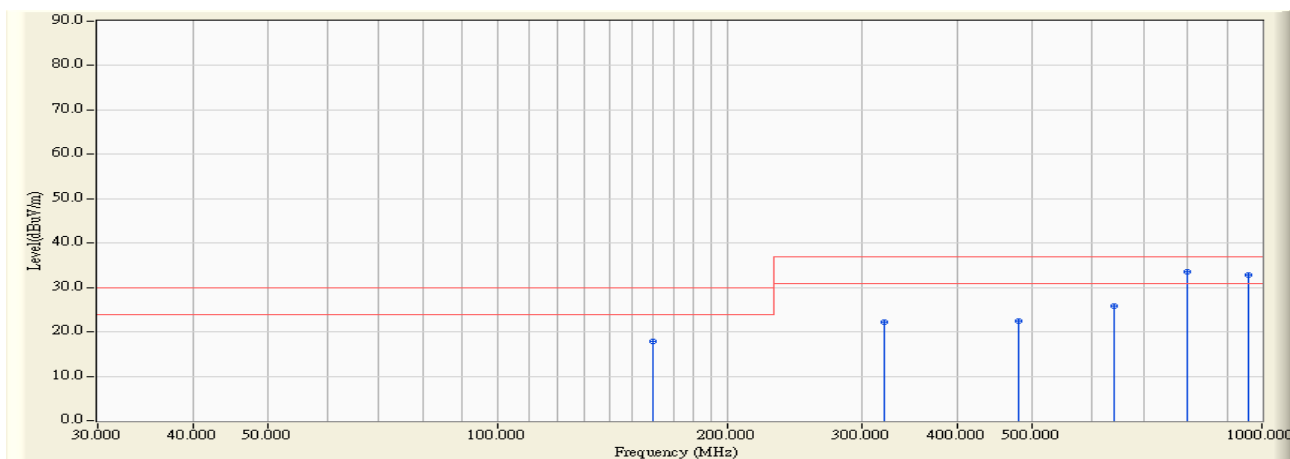


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		160.000	13.675	4.100	17.775	-12.225	30.000	QUASIPeAK
2		320.025	17.977	4.280	22.257	-14.743	37.000	QUASIPeAK
3		480.050	22.528	0.000	22.528	-14.472	37.000	QUASIPeAK
4		640.050	25.403	0.520	25.923	-11.077	37.000	QUASIPeAK
5	*	800.078	27.880	5.760	33.640	-3.360	37.000	QUASIPeAK
6		960.095	31.201	1.500	32.700	-4.300	37.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : CB1	Time : 2013/08/27 - 13:48
Limit : CISPR_22_B_(Above_1G)_3M_PK	Margin : 0
Probe : CB1_CISPR_22_B(above1G)-1_0901 - VERTICAL	Power : DC3.7V (Power by battery)
EUT : Scanner	Note : Mode 1: Scan to SD

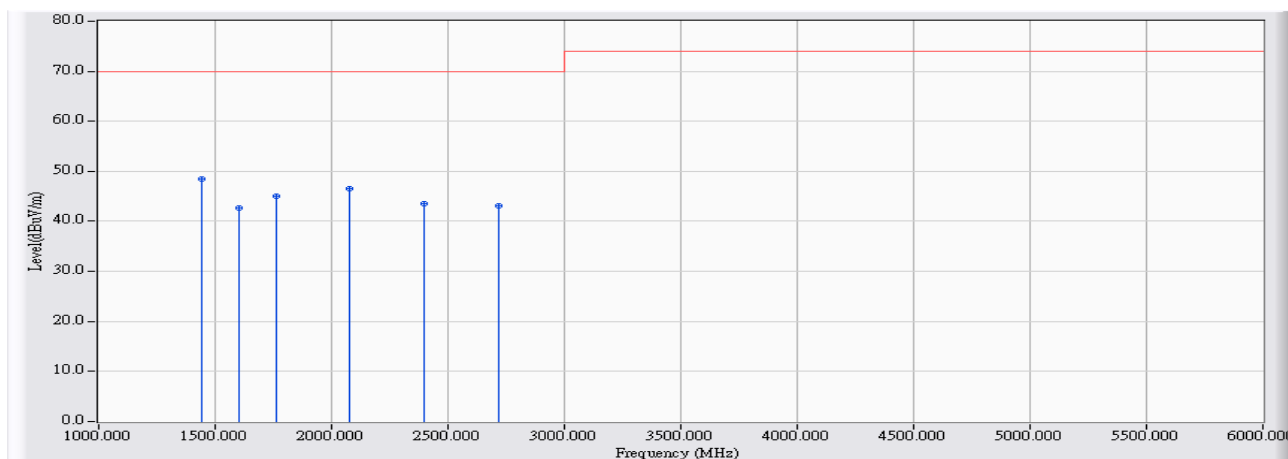


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	1440.000	-7.361	55.821	48.460	-21.540	70.000	PEAK
2		1600.000	-6.756	49.486	42.730	-27.270	70.000	PEAK
3		1760.000	-6.193	51.259	45.066	-24.934	70.000	PEAK
4		2080.000	-5.133	51.742	46.609	-23.391	70.000	PEAK
5		2400.000	-4.305	47.904	43.599	-26.401	70.000	PEAK
6		2720.000	-3.155	46.209	43.054	-26.946	70.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : Site2	Time : 2013/08/23 - 14:23
Limit : CISPR_B_10M_QP	Margin : 6
Probe : SITE2_10M-3_0426 - HORIZONTAL	Power : DC3.7V (Power by battery)
EUT : Scanner	Note : Mode 2: WiFi

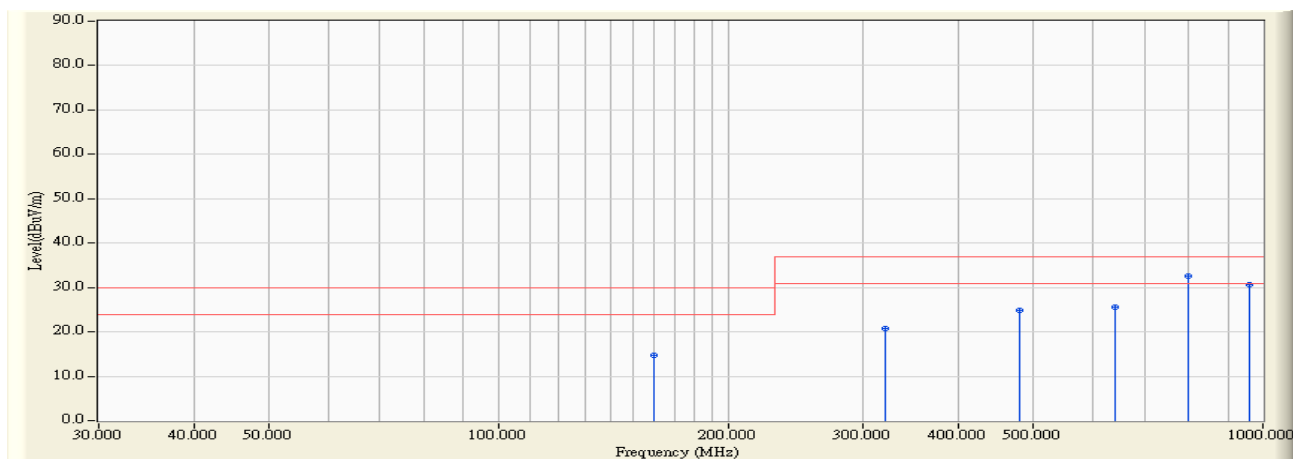


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		160.000	13.675	1.100	14.775	-15.225	30.000	QUASIPeAK
2		320.000	17.976	2.840	20.816	-16.184	37.000	QUASIPeAK
3		480.050	22.528	2.240	24.768	-12.232	37.000	QUASIPeAK
4		640.050	25.403	0.200	25.603	-11.397	37.000	QUASIPeAK
5	*	800.075	27.880	4.720	32.600	-4.400	37.000	QUASIPeAK
6		960.100	30.240	0.500	30.740	-6.260	37.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : CB1	Time : 2013/08/27 - 14:11
Limit : CISPR_22_B_(Above_1G)_3M_PK	Margin : 0
Probe : CB1_CISPR_22_B(above1G)-1_0901 - HORIZONTAL	Power : DC3.7V (Power by battery)
EUT : Scanner	Note : Mode 2: WiFi

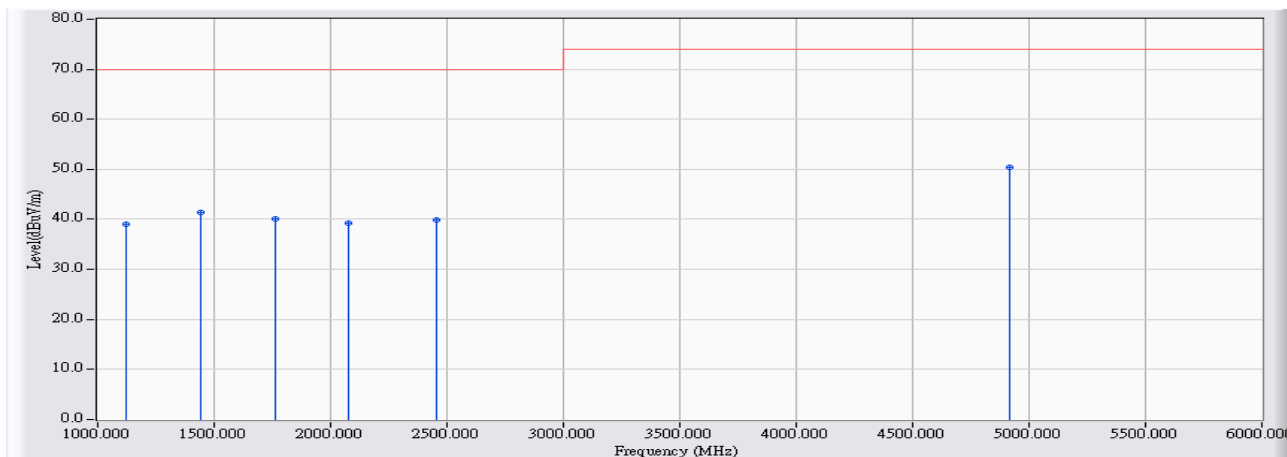


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		1120.000	-8.724	47.768	39.044	-30.956	70.000	PEAK
2		1440.000	-7.361	48.657	41.296	-28.704	70.000	PEAK
3		1760.000	-6.193	46.209	40.016	-29.984	70.000	PEAK
4		2080.000	-5.133	44.377	39.244	-30.756	70.000	PEAK
5		2455.000	-4.163	44.061	39.898	-30.102	70.000	PEAK
6	*	4915.000	2.486	48.010	50.496	-23.504	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : Site2	Time : 2013/08/23 - 13:18
Limit : CISPR_B_10M_QP	Margin : 6
Probe : SITE2_10M-3_0426 - VERTICAL	Power : DC3.7V (Power by battery)
EUT : Scanner	Note : Mode 2: WiFi

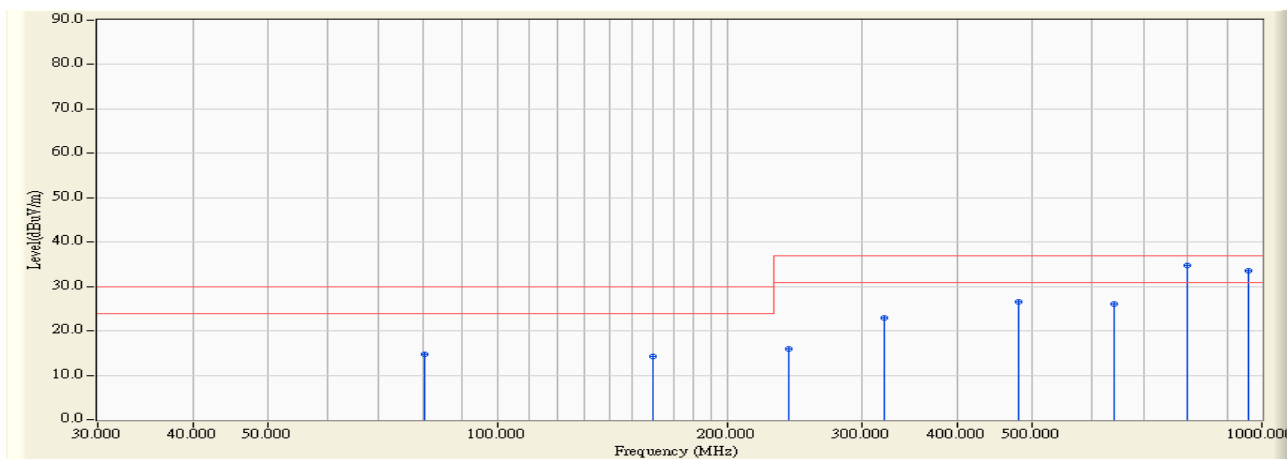


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		80.375	11.159	3.530	14.689	-15.311	30.000	QUASIPeAK
2		160.000	13.675	0.600	14.275	-15.725	30.000	QUASIPeAK
3		240.000	15.670	0.300	15.970	-21.030	37.000	QUASIPeAK
4		320.025	17.977	4.960	22.937	-14.063	37.000	QUASIPeAK
5		480.050	22.528	4.080	26.608	-10.392	37.000	QUASIPeAK
6		640.050	25.403	0.540	25.943	-11.057	37.000	QUASIPeAK
7	*	800.075	27.880	6.820	34.700	-2.300	37.000	QUASIPeAK
8		960.100	31.201	2.220	33.421	-3.579	37.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : CB1	Time : 2013/08/27 - 14:02
Limit : CISPR_22_B_(Above_1G)_3M_PK	Margin : 0
Probe : CB1_CISPR_22_B(above1G)-1_0901 - VERTICAL	Power : DC3.7V (Power by battery)
EUT : Scanner	Note : Mode 2: WiFi

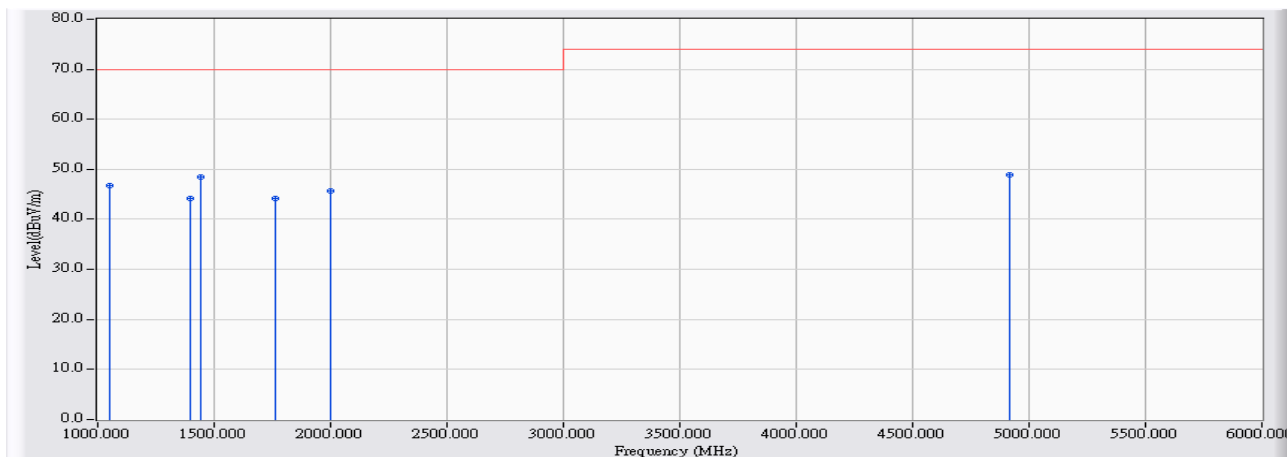


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		1050.000	-9.022	55.858	46.836	-23.164	70.000	PEAK
2		1395.000	-7.553	51.812	44.259	-25.741	70.000	PEAK
3	*	1440.000	-7.361	55.892	48.531	-21.469	70.000	PEAK
4		1760.000	-6.193	50.312	44.119	-25.881	70.000	PEAK
5		2000.000	-5.345	51.053	45.709	-24.291	70.000	PEAK
6		4915.000	2.486	46.334	48.820	-25.180	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : Site2	Time : 2013/08/23 - 14:24
Limit : CISPR_B_10M_QP	Margin : 6
Probe : SITE2_10M-3_0426 - HORIZONTAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 3: Read

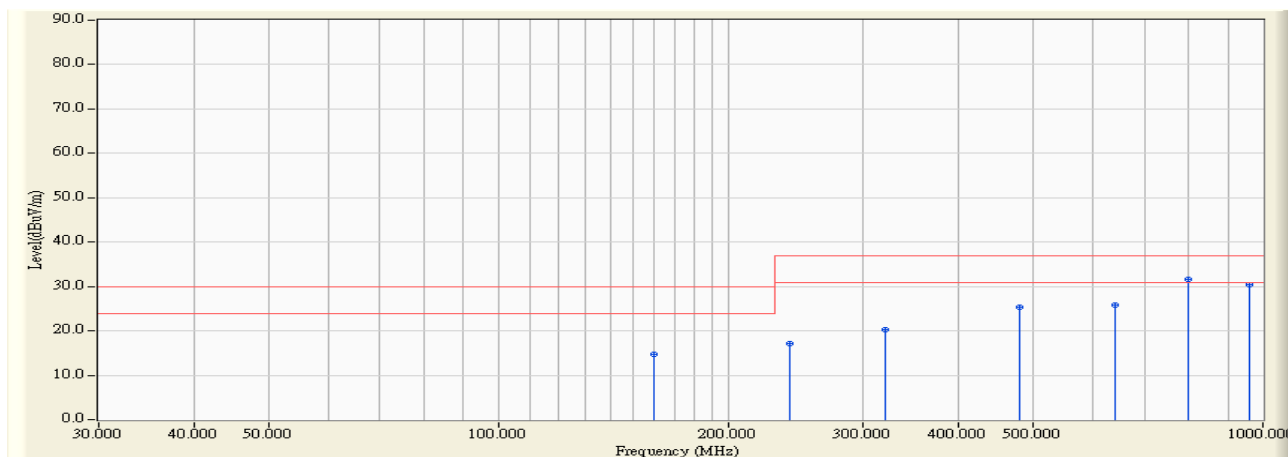


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		160.000	13.675	1.120	14.795	-15.205	30.000	QUASIPeAK
2		240.000	15.670	1.470	17.140	-19.860	37.000	QUASIPeAK
3		320.000	17.976	2.300	20.276	-16.724	37.000	QUASIPeAK
4		480.050	22.528	2.780	25.308	-11.692	37.000	QUASIPeAK
5		640.000	25.402	0.300	25.702	-11.298	37.000	QUASIPeAK
6	*	800.075	27.880	3.640	31.520	-5.480	37.000	QUASIPeAK
7		960.010	30.240	0.200	30.440	-6.560	37.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : CB1	Time : 2013/08/27 - 14:30
Limit : CISPR_22_B_(Above_1G)_3M_PK	Margin : 0
Probe : CB1_CISPR_22_B(above1G)-1_0901 - HORIZONTAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 3: Read

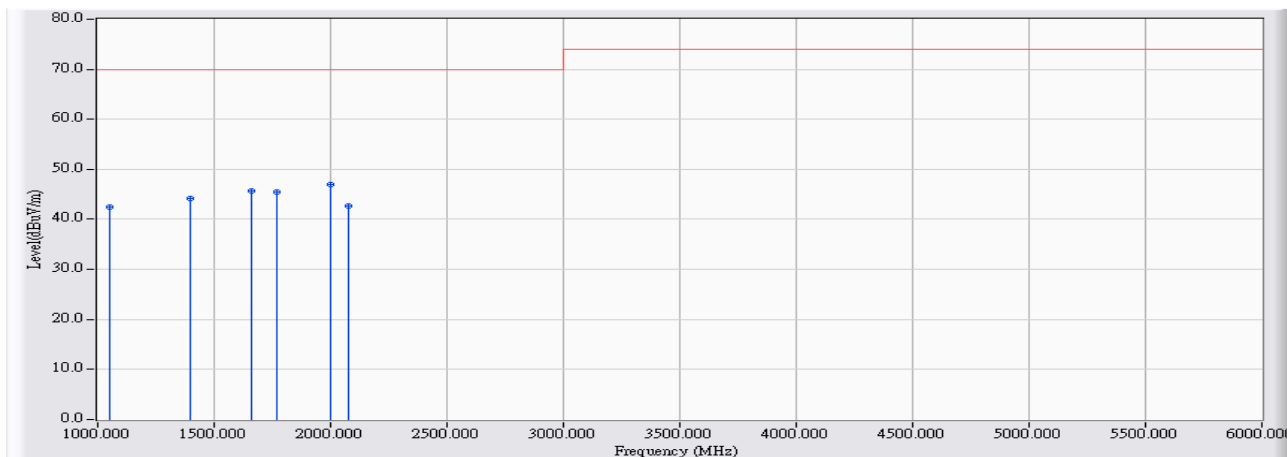


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		1050.000	-9.022	51.555	42.533	-27.467	70.000	PEAK
2		1400.000	-7.531	51.608	44.077	-25.923	70.000	PEAK
3		1660.000	-6.545	52.133	45.588	-24.412	70.000	PEAK
4		1770.000	-6.158	51.617	45.459	-24.541	70.000	PEAK
5	*	2000.000	-5.345	52.254	46.910	-23.090	70.000	PEAK
6		2080.000	-5.133	47.791	42.658	-27.342	70.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : Site2	Time : 2013/08/23 - 14:23
Limit : CISPR_B_10M_QP	Margin : 6
Probe : SITE2_10M-3_0426 - VERTICAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 3: Read

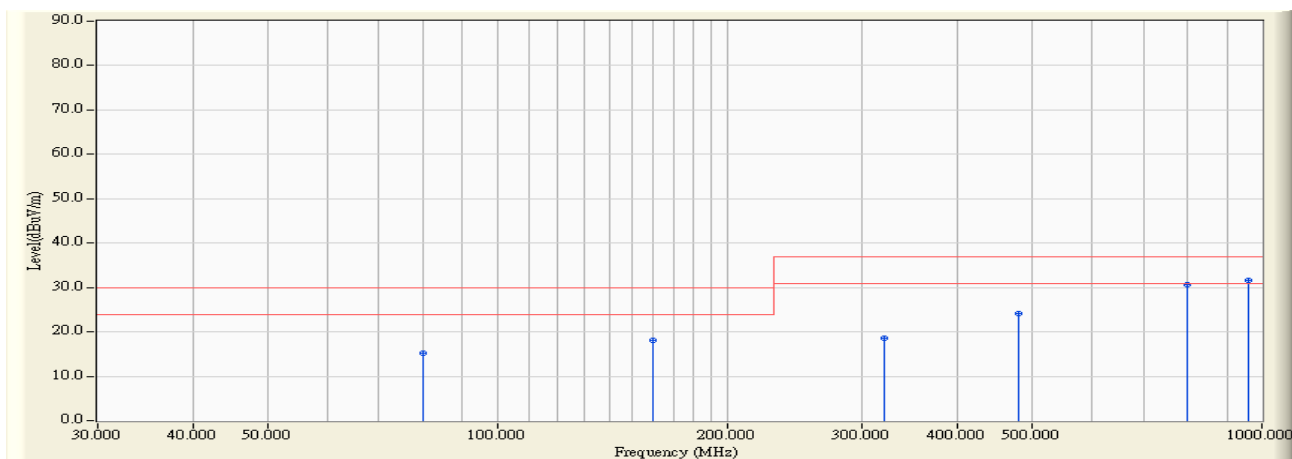


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		79.875	11.073	4.140	15.213	-14.787	30.000	QUASIPeAK
2		160.000	13.675	4.440	18.115	-11.885	30.000	QUASIPeAK
3		320.025	17.977	0.600	18.577	-18.423	37.000	QUASIPeAK
4		480.050	22.528	1.600	24.128	-12.872	37.000	QUASIPeAK
5		800.075	27.880	2.680	30.560	-6.440	37.000	QUASIPeAK
6	*	960.100	31.201	0.340	31.541	-5.459	37.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : CB1	Time : 2013/08/27 - 14:21
Limit : CISPR_22_B_(Above_1G)_3M_PK	Margin : 0
Probe : CB1_CISPR_22_B(above1G)-1_0901 - VERTICAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 3: Read

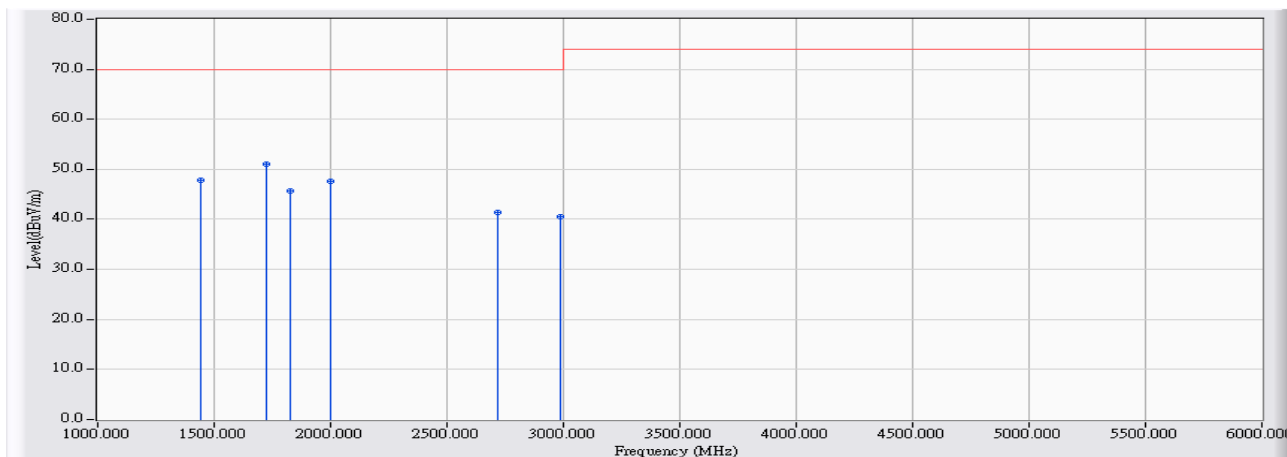


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		1440.000	-7.361	55.165	47.804	-22.196	70.000	PEAK
2	*	1725.000	-6.317	57.305	50.988	-19.012	70.000	PEAK
3		1830.000	-5.947	51.565	45.618	-24.382	70.000	PEAK
4		2000.000	-5.345	53.044	47.700	-22.300	70.000	PEAK
5		2720.000	-3.155	44.596	41.441	-28.559	70.000	PEAK
6		2990.000	-2.069	42.644	40.575	-29.425	70.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : Site2	Time : 2013/08/23 - 15:39
Limit : CISPR_B_10M_QP	Margin : 6
Probe : SITE2_10M-3_0426 - HORIZONTAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 4: Scan to PC

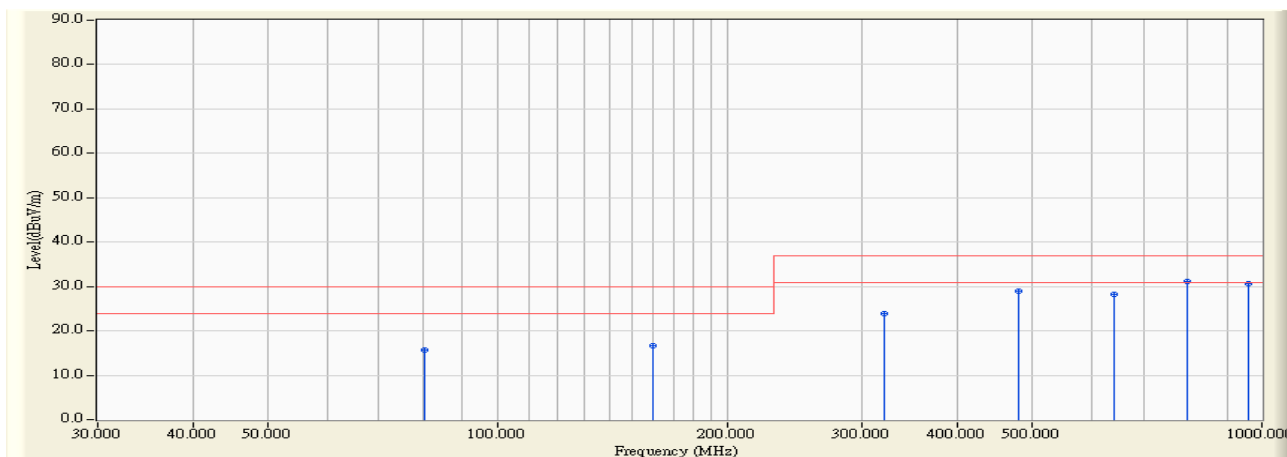


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		80.375	11.159	4.610	15.769	-14.231	30.000	QUASIPeAK
2		160.000	13.675	2.960	16.635	-13.365	30.000	QUASIPeAK
3		320.025	17.977	5.940	23.917	-13.083	37.000	QUASIPeAK
4		480.050	22.528	6.320	28.848	-8.152	37.000	QUASIPeAK
5		640.050	25.403	2.900	28.303	-8.697	37.000	QUASIPeAK
6	*	800.075	27.880	3.180	31.060	-5.940	37.000	QUASIPeAK
7		960.090	30.241	0.300	30.540	-6.460	37.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : CB1	Time : 2013/08/27 - 14:42
Limit : CISPR_22_B_(Above_1G)_3M_PK	Margin : 0
Probe : CB1_CISPR_22_B(above1G)-1_0901 - HORIZONTAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 4: Scan to PC

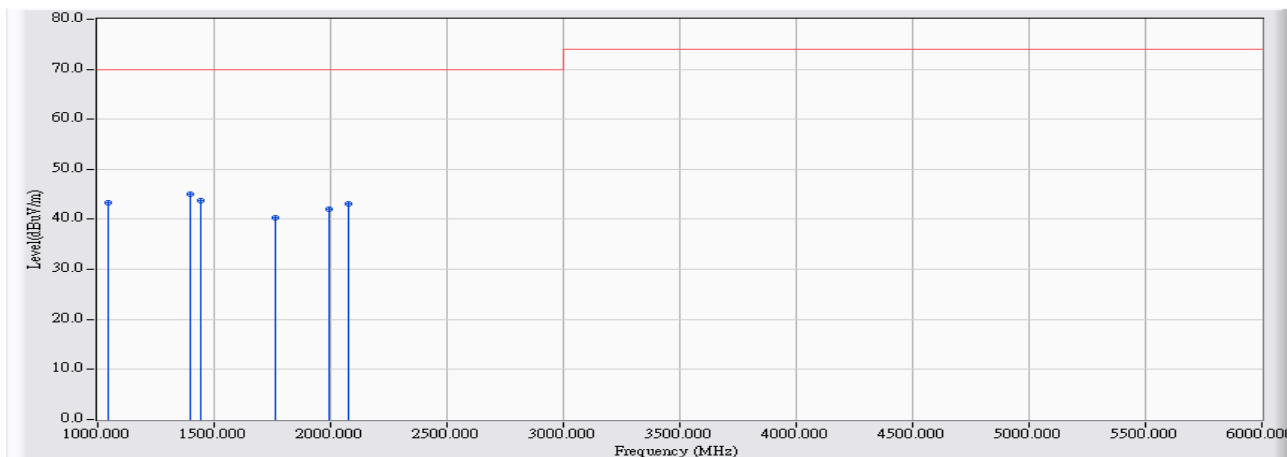


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		1045.000	-9.043	52.348	43.305	-26.695	70.000	PEAK
2	*	1400.000	-7.531	52.581	45.050	-24.950	70.000	PEAK
3		1440.000	-7.361	51.193	43.832	-26.168	70.000	PEAK
4		1760.000	-6.193	46.416	40.223	-29.777	70.000	PEAK
5		1995.000	-5.364	47.508	42.144	-27.856	70.000	PEAK
6		2080.000	-5.133	48.282	43.149	-26.851	70.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : Site2	Time : 2013/08/23 - 15:22
Limit : CISPR_B_10M_QP	Margin : 6
Probe : SITE2_10M-3_0426 - VERTICAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 4: Scan to PC

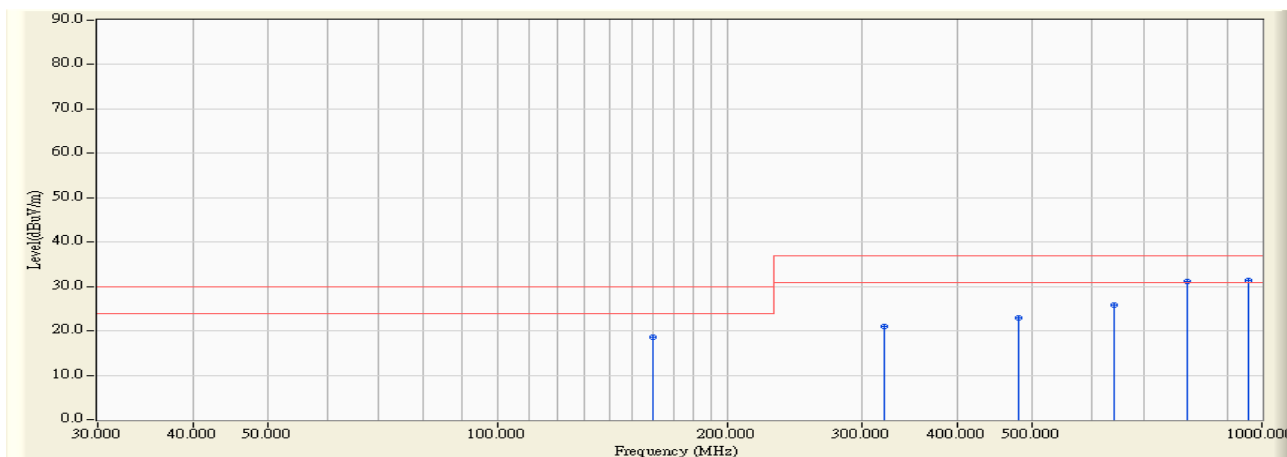


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		160.000	13.675	4.840	18.515	-11.485	30.000	QUASIPeAK
2		320.025	17.977	2.920	20.897	-16.103	37.000	QUASIPeAK
3		480.050	22.528	0.300	22.828	-14.172	37.000	QUASIPeAK
4		640.050	25.403	0.300	25.703	-11.297	37.000	QUASIPeAK
5		800.075	27.880	3.180	31.060	-5.940	37.000	QUASIPeAK
6	*	960.000	31.195	0.200	31.395	-5.605	37.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : CB1	Time : 2013/08/27 - 14:35
Limit : CISPR_22_B_(Above_1G)_3M_PK	Margin : 0
Probe : CB1_CISPR_22_B(above1G)-1_0901 - VERTICAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 4: Scan to PC

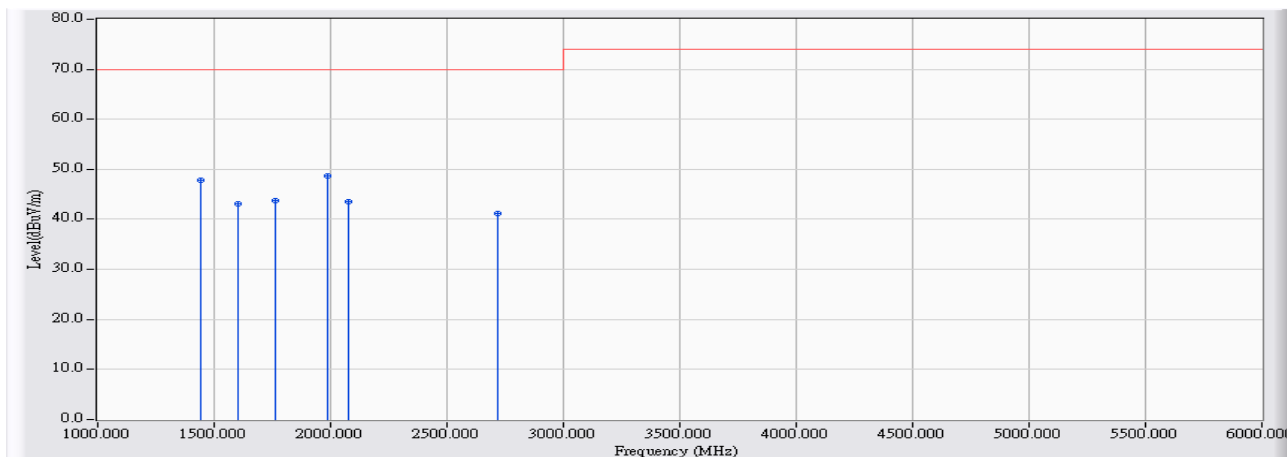


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		1440.000	-7.361	55.236	47.875	-22.125	70.000	PEAK
2		1600.000	-6.756	49.773	43.017	-26.983	70.000	PEAK
3		1760.000	-6.193	49.913	43.720	-26.280	70.000	PEAK
4	*	1990.000	-5.383	53.991	48.608	-21.392	70.000	PEAK
5		2080.000	-5.133	48.692	43.559	-26.441	70.000	PEAK
6		2720.000	-3.155	44.376	41.221	-28.779	70.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : Site2	Time : 2013/08/23 - 14:46
Limit : CISPR_B_10M_QP	Margin : 6
Probe : SITE2_10M-3_0426 - HORIZONTAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 5: Charge

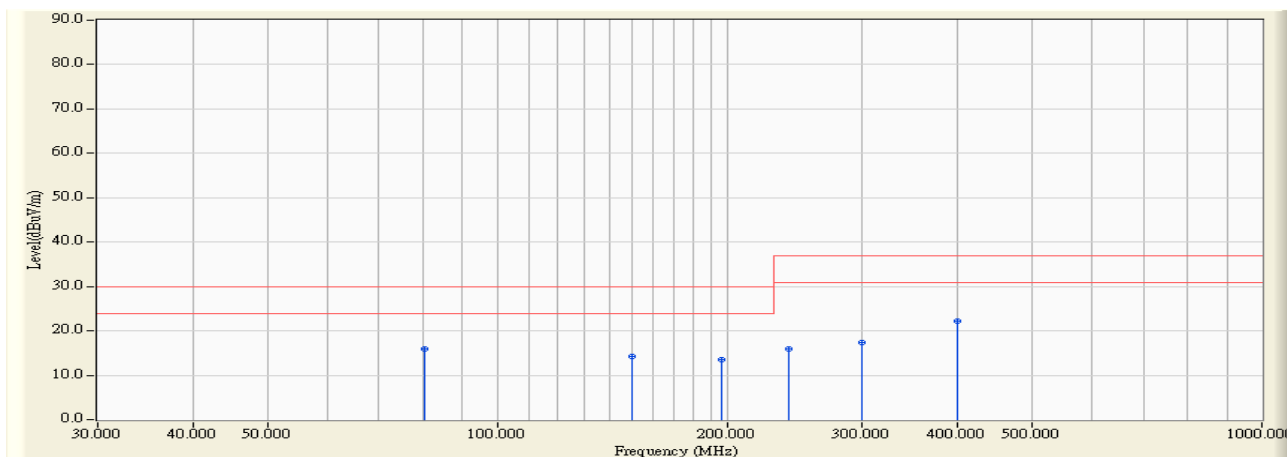


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	80.375	11.159	4.650	15.809	-14.191	30.000	QUASIPeAK
2		150.000	14.033	0.300	14.333	-15.667	30.000	QUASIPeAK
3		196.600	13.012	0.390	13.402	-16.598	30.000	QUASIPeAK
4		240.000	15.670	0.200	15.870	-21.130	37.000	QUASIPeAK
5		300.000	17.082	0.300	17.382	-19.618	37.000	QUASIPeAK
6		400.000	21.572	0.600	22.172	-14.828	37.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : CB1	Time : 2013/08/27 - 14:51
Limit : CISPR_22_B_(Above_1G)_3M_PK	Margin : 0
Probe : CB1_CISPR_22_B(above1G)-1_0901 - HORIZONTAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 5: Charge

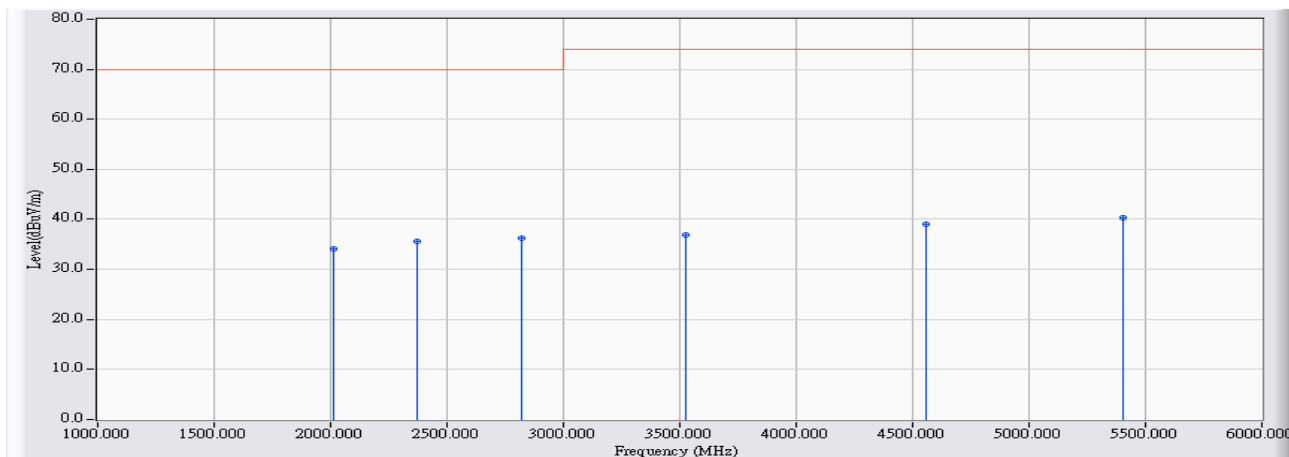


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2015.000	-5.301	39.351	34.050	-35.950	70.000	PEAK
2		2370.000	-4.383	39.929	35.546	-34.454	70.000	PEAK
3	*	2820.000	-2.752	39.089	36.337	-33.663	70.000	PEAK
4		3525.000	-1.505	38.419	36.914	-37.086	74.000	PEAK
5		4560.000	1.408	37.580	38.988	-35.012	74.000	PEAK
6		5405.000	3.525	36.698	40.223	-33.777	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Site : Site2	Time : 2013/08/23 - 14:52
Limit : CISPR_B_10M_QP	Margin : 6
Probe : SITE2_10M-3_0426 - VERTICAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 5: Charge

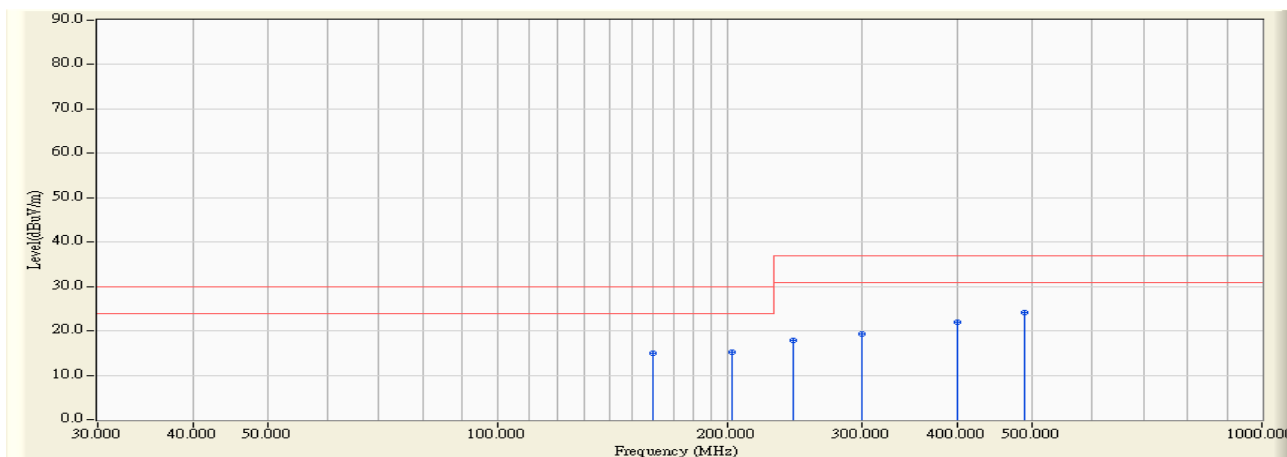


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		160.000	13.675	1.320	14.995	-15.005	30.000	QUASIPeAK
2		202.750	13.179	2.100	15.279	-14.721	30.000	QUASIPeAK
3		243.425	15.899	2.000	17.899	-19.101	37.000	QUASIPeAK
4		300.000	17.082	2.300	19.382	-17.618	37.000	QUASIPeAK
5		400.000	21.572	0.300	21.872	-15.128	37.000	QUASIPeAK
6	*	488.950	22.634	1.400	24.033	-12.967	37.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak value.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Site : CB1	Time : 2013/08/27 - 14:49
Limit : CISPR_22_B_(Above_1G)_3M_PK	Margin : 0
Probe : CB1_CISPR_22_B(above1G)-1_0901 - VERTICAL	Power : AC 240V/50Hz
EUT : Scanner	Note : Mode 5: Charge

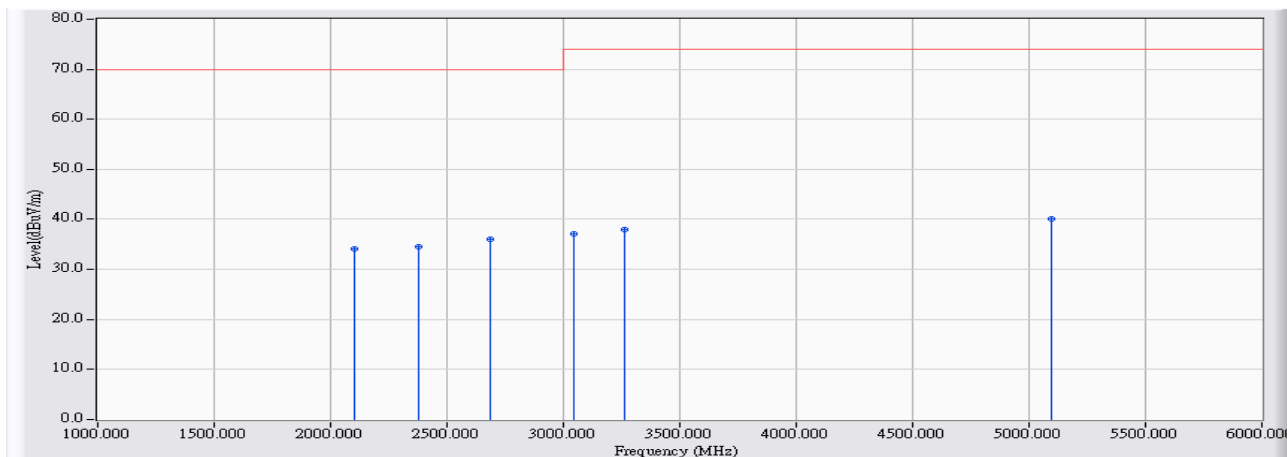

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2105.000	-5.069	39.239	34.170	-35.830	70.000	PEAK
2		2375.000	-4.370	38.992	34.622	-35.378	70.000	PEAK
3		2685.000	-3.296	39.430	36.134	-33.866	70.000	PEAK
4		3045.000	-1.987	39.163	37.176	-36.824	74.000	PEAK
5		3260.000	-1.793	39.723	37.930	-36.070	74.000	PEAK
6	*	5095.000	2.927	37.251	40.178	-33.822	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

4.7. Test Photograph

Test Mode : Mode 1: Scan to SD

Description : Front View of Radiated Emission Test Setup




Test Mode : Mode 1: Scan to SD

Description : Back View of Radiated Emission Test Setup




Test Mode : Mode 1: Scan to SD

Description : Front View of Radiated Emission Test Setup Horn

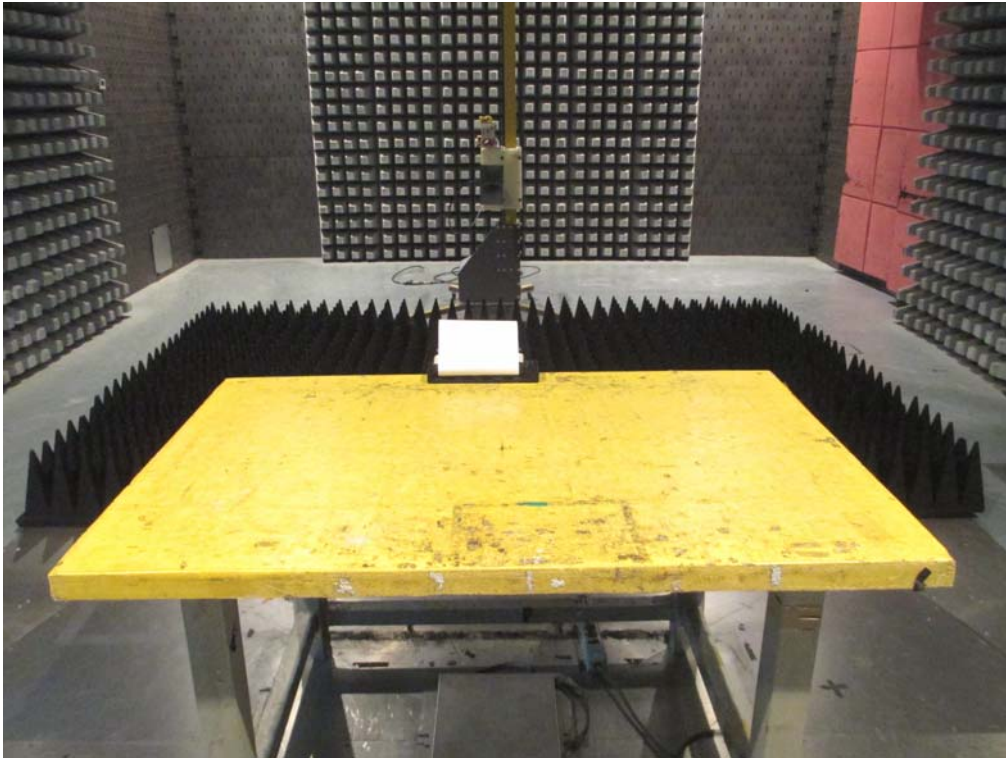

Test Mode : Mode 1: Scan to SD

Description : Back View of Radiated Emission Test Setup -Horn

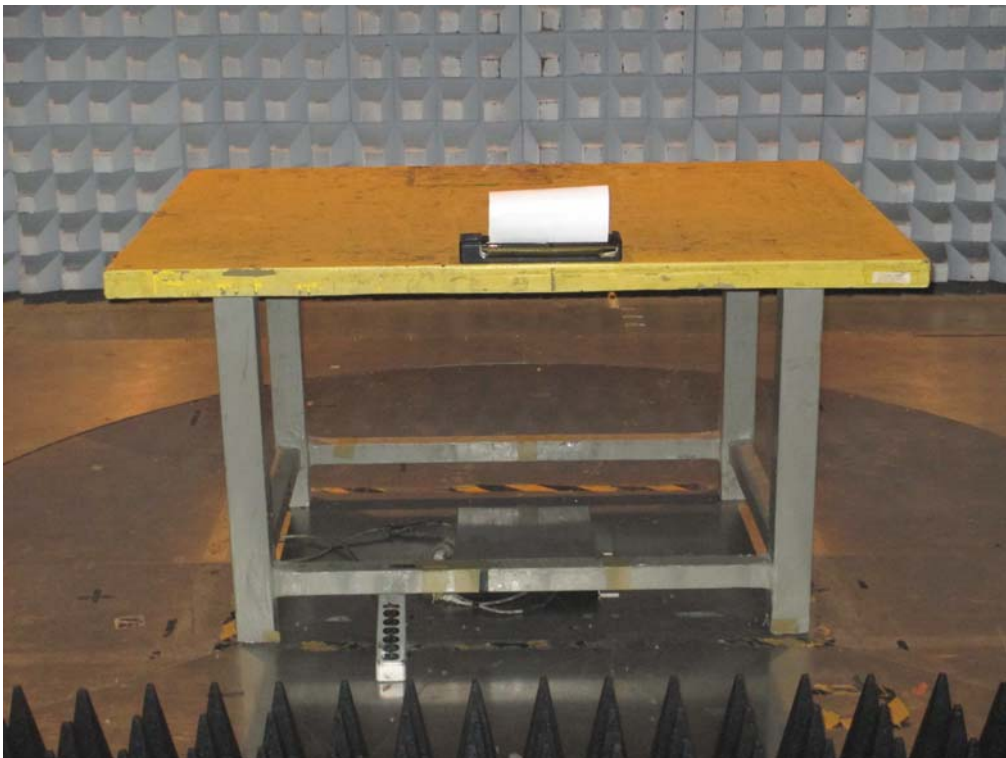

Test Mode : Mode 2: WiFi

Description : Front View of Radiated Emission Test Setup




Test Mode : Mode 2: WiFi

Description : Back View of Radiated Emission Test Setup



Test Mode : Mode 2: WiFi

Description : Front View of Radiated Emission Test Setup-Horn

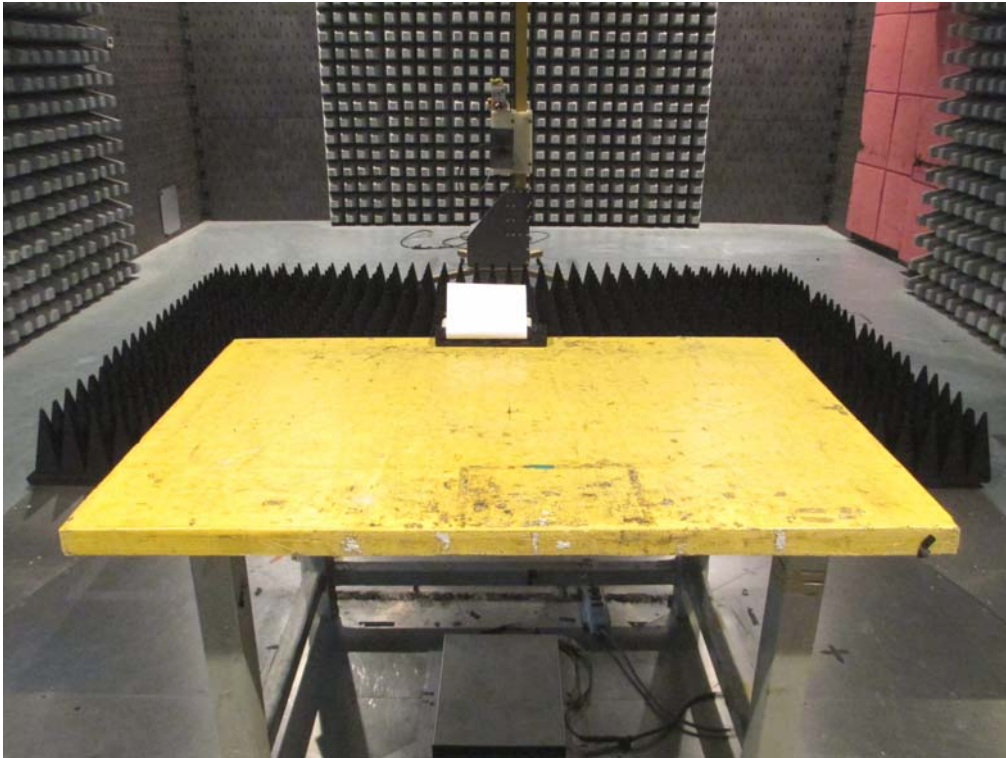

Test Mode : Mode 2: WiFi

Description : Back View of Radiated Emission Test Setup-Horn



Test Mode : Mode 3: Read

Description : Front View of Radiated Emission Test Setup




Test Mode : Mode 3: Read

Description : Back View of Radiated Emission Test Setup



Test Mode : Mode 3: Read

Description : Front View of Radiated Emission Test Setup-Horn

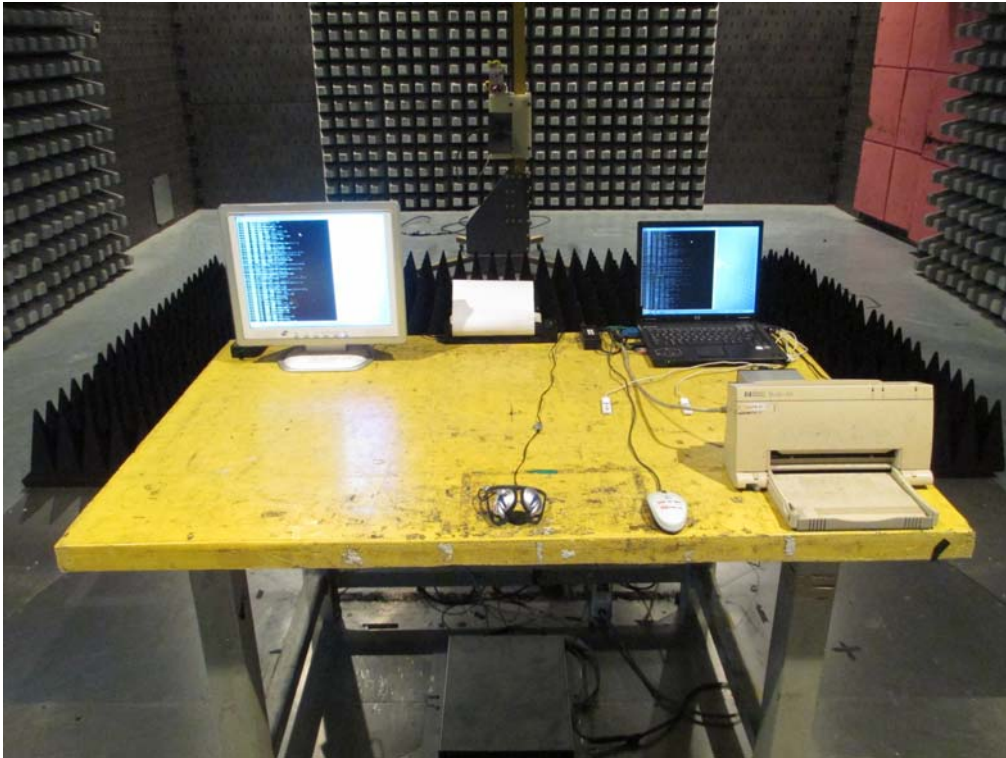

Test Mode : Mode 3: Read

Description : Back View of Radiated Emission Test Setup-Horn



Test Mode : Mode 4: Scan to PC

Description : Front View of Radiated Emission Test Setup



Test Mode : Mode 4: Scan to PC

Description : Back View of Radiated Emission Test Setup




Test Mode : Mode 4: Scan to PC

Description : Front View of Radiated Emission Test Setup Horn



Test Mode : Mode 4: Scan to PC

Description : Back View of Radiated Emission Test Setup -Horn

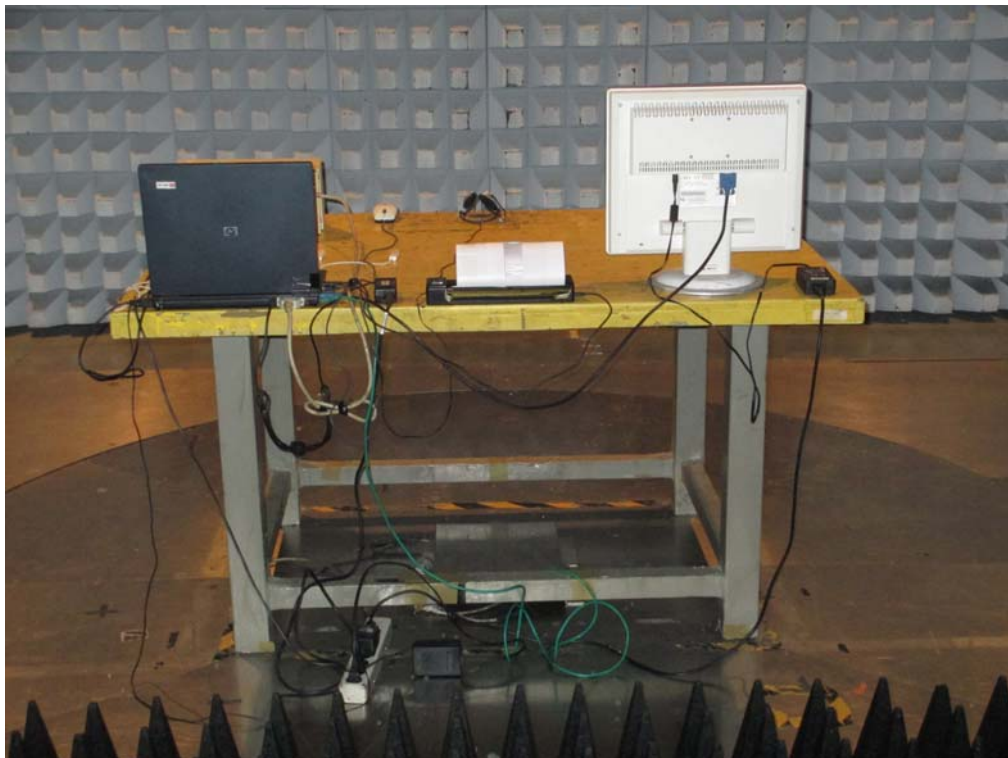

Test Mode : Mode 5: Charge

Description : Front View of Radiated Emission Test Setup




Test Mode : Mode 5: Charge

Description : Back View of Radiated Emission Test Setup




Test Mode : Mode 5: Charge

Description : Front View of Radiated Emission Test Setup-Horn

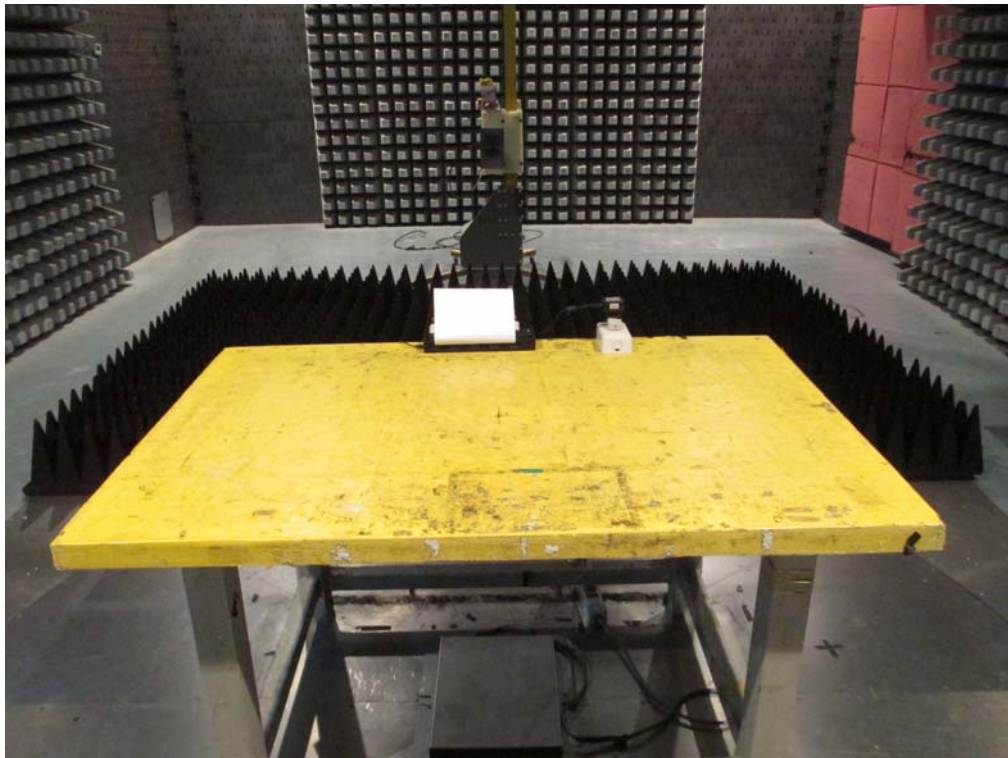

Test Mode : Mode 5: Charge

Description : Back View of Radiated Emission Test Setup-Horn

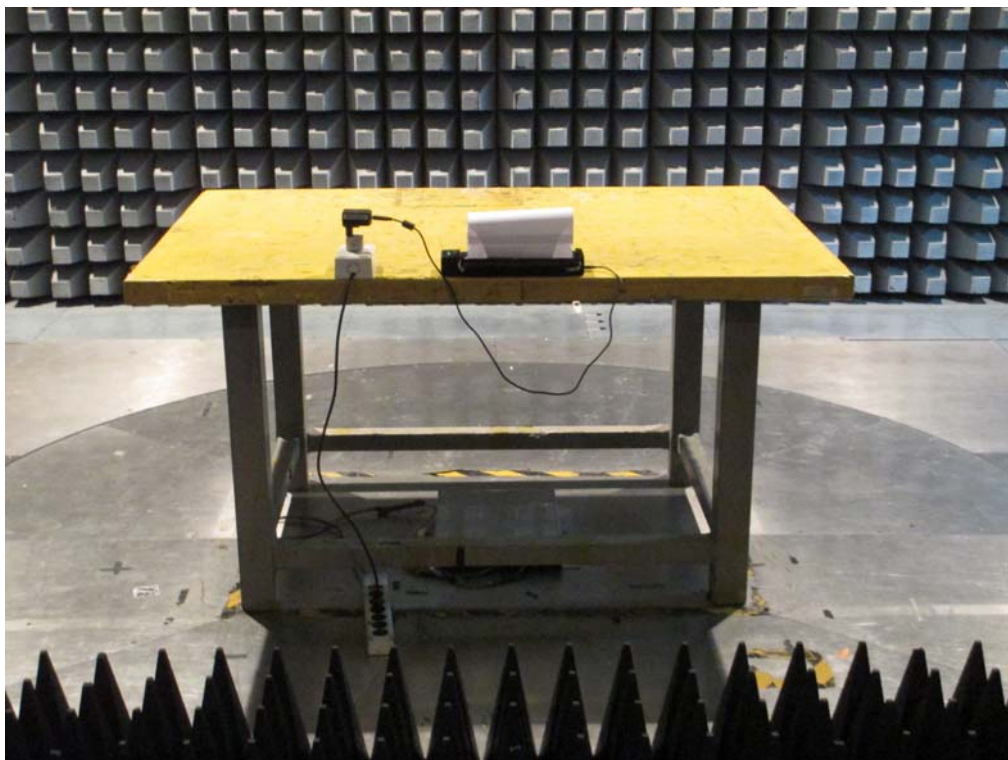

5. Attachment

➤ EUT Photograph

(1) EUT Photo



(2) EUT Photo



(3) EUT Photo

