

Prepared for

: I.R.I.S.S.A. Image Recognition Integrated Systems

Address

Rue du Bosquet 10, 1348 Louvain 1a Neuve,

Belguim

Prepared by

Accurate Technology Co., Ltd.

Address

No.345, Baima Block, Guantai Road, Nancheng,

Dongguan, Guangdong, P. R, China

Tel

: +86-769-23301666

Fax

+86-769-23301600

Report No. :

DGC150624035K01

Date of Report :

June 29, 2015



No.: DGC150624035K01

Date: June 29, 2015

Checked by:

Page 1 of 7

Applicant: I.R.I.S.S.A. Image Recognition Integrated Systems **Address:** Rue du Bosquet 10, 1348 Louvain 1a Neuve, Belguim

Manufacturer: /

Address: /

Sample Name: Digital highlighter, supporting BLE and USB

Model No.: 2.0

Brand Name: IRISPen 7Air

Sample Weight: 29.71 g

Category under the WEEE Directive: 4th (Consumer equipment)

Approved by:

Written by:



No.: DGC150624035K01


Date: June 29, 2015

Page 2 of 7

Result of Reuse /Recycling /Recovery Assessment:

Reuse /Recycling /Recovery	Reuse /Recycling (%)	Recovery (%)	
Reuse /Recycling /Recovery Targets under the 2012/19/EC WEEE Directive	65	75	
Result of Assessment	77.39	78.62	
WEEE requirement compliance	OK	OK	

Appearance of the Product:

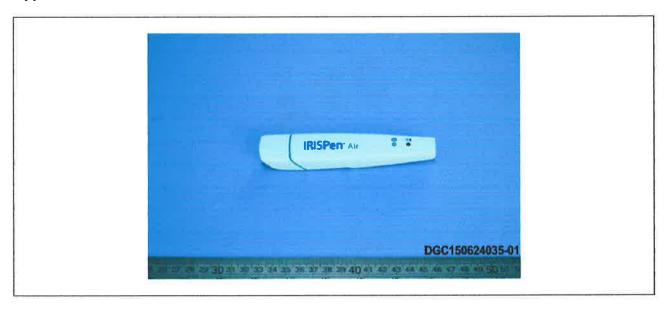

Selective Treatment for Materials and Components:

According to Articles 6(1) and the Annex II of the WEEE Directive, this product contains components and material which should Selective Treatment as below:

- (1) Batteries.
- (2) Printed circuit boards of mobile phones generally, and of other devices if the surface of the printed circuit board is greater than 10 square centimetres.




No.: DGC150624035K01

Date: June 29, 2015

Page 3 of 7

Disassembly Tree:

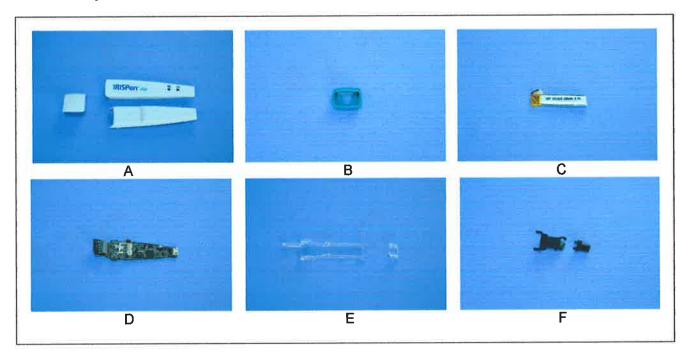



No.: DGC150624035K01

Date: June 29, 2015

Page 4 of 7

Disassembly Procedure:

The disassembly procedure taken here is in accordance with the treatment requirements under the Annex II of the WEEE Directive. In addition, to consider economic and efficiency factors, manual operation and disassembly tools have been applied to separate the components and materials from this product in order to simulate the scenario at the treatment facility, and to achieve the objective that the separated components and materials can be reused, recycled and recovered.

1) Connection technique:

For this product, the main connection technology including as following: Hasp.

2) Disassembly tool:

The disassembly tools used for this product show as following:

Disassembly Tool	Pictures	
Pliers		

3) Disassembly time:

Less than 1 minute.



No.: DGC150624035K01

Date: June 29, 2015

Page 5 of 7

Material and Recycling Information:

According to the information declared by the applicant company, the material and recycling information for this product is described in the following table.

The reuse, recycling and recovery assessment for this product is based upon economic and efficiency considerations, and the waste treatment technologies and equipment that are most frequently available to the market.

Photo No.	Component	Material Composition	Weight(g)	Reuse/ Recycling (%)	Energy Recovery (%)	Recovery (%)
Α	White plastic shell	Plastic	15.06	65.13		65.13
В	Green plastic	Plastic	1.15		0.55	0.55
С	Battery	Mixture	4.24			
D	PCB	PCB	4.66		· · · · ·	
Ē	Transparent plastic	Plastic	3.19	12.26		12.26
F	Black plastic	Plastic	1.41	-	0.68	0.68
TOTAL		29.71	77.39	1.23	78.62	

Note:

- 1. Due to their insignificant weight and the difficulty of their separation in a manual operation, sticker, solder, paint and printing materials are not included in this assessment.
- 2. Plastic containing brominated flame retardants is not assessed in the list.

Recycling and Recovery Rate Calculation:

Reuse Recycling & Recovery Rate using in the report are calculated as following formulas:

Reuse & Recycling Rate = (Reuse & Recycling Weight) / (Product Total Weight) (%)

Recovery Rate = (Reuse& Recycling Weight + Energy Recovery Weight) / (Product Total Weight) (%)

Total weigh of the product is including the main product and accessories.



No.: DGC150624035K01

Date: June 29, 2015

Page 6 of 7

ANNEX II of WEEE Directive:

Selective treatment for materials and components of waste electrical and electronic equipment:

- Polychlorinated biphenyls (PCB) containing capacitors in accordance with Council Directive 96/59/EC of 16 September 1996 on the disposal of polychlorinated biphenyls and polychlorinated terphenyls (PCB/PCT);
- Mercury containing components, such as switches or backlighting lamps;
- Batteries:
- Printed circuit boards of mobile phones generally, and of other devices if the surface of the printed circuit board is greater than 10 square centimeters;
- Toner cartridges, liquid and pasty, as well as colour toner;
- Plastic containing brominated flame retardants;
- Asbestos waste and components which contain asbestors;
- Cathode ray tubes;
- Chlorofluorocarbons (CFC), hydrochlorofluorocarbons (HCFF) or hydrofluorocarbons (HFC), hydrocarbons (HC);
- Gas discharge lamps;
- Liquid crystal displays (together with their casing where appropriate) of a surface greater than 100 square centimeters and all those back-lighted with gas discharge lamps;
- External electric cables:
- Components containing refractory ceramic fibres as described in Commission Directive 97/69/EC of 5 December 1997 adapting to technical progress Council Directive 67/548/EEC relating to the classification, packaging and labeling of dangerous substances;
- Components containing radioactive substances with the exception of components that are below the
 exemption thresholds set in Article 3 of and Annex I to Council Directive 96/29/Euratom of 13 May
 1996 laying down basic safety standards for the protection of the health of workers and the general
 public against the dangers arising from ionizing radiation;
- Electrolyte capacitors containing substances of concern (height>25mm, diameter >25mm or proportionately similar volume).

Recommendations for WEEE Directive Compliance:

- In order to avoid the product not meeting the reuse/recycling /recovery targets regulated under the WEEE Directive and the regulations of EU countries, the manufacturer should, when selecting material and components design, consider they can be easy to reuse and recycle, This consideration will lessen the impact of the required international environmental directives and also improve the product's competitiveness;
- It is recommended that the manufacturer, when designing new product, especially where components and material have a large weight ratio, should consider using recyclable materials in order to increase the product's reuse/recycling /recover ration;
- If a product has changed its product design, or materials or components employed, then the product should be reassessed and retested in accordance with the WEEE Directive for reuse/recycling /recovery assessment and RoHS for restricted /banned substances requirements;
- There have no symbol (shown in Annex I) for the marking of electrical and electronic equipment. It is recommended that the manufacturer should be printed the symbol on the packaging and on the instructions for use.
- It is recommended that the manufacturer should marked the information of product materials on the product (For example: ">ABS<" indicate that the material is mainly ABS, ">PC+ABS<" indicate that the material is mixture but mainly is PC).



No.: DGC150624035K01

Date: June 29, 2015

Page 7 of 7

Annex IV symbol for the marking of EEE

The symbol indicating separate collection for EEE consists of the crossed-out wheeled bin, as shown below. The symbol must be printed visibly, legibly and indelibly.



End of Report